Product Description

000:	000 00 000 00 00 00 ~0 00 000
00 00:	6518K
00 0 0:	0000 00 000 000 00; PU 0,
000:	1. 000 00 00 0. 00 00 000 00000.
	2. non 🛮 🖂 🖂 🖂 💮
<u> </u>	1. 0000 '00 00' 000 000 0000. 000 0000 0
	2. non 🛮 🖺
<u></u>	
<u></u> :	
00:	
00 00:	000 'HI-POLY' 000 '000' 000 '00' 000 000 00000.
DD:	
<u></u> :	
<u></u>	37-47
□□:	CE EN ISO 20345:2011 SB-P SRC DDDD.
	6 <u> </u>
00:	00/ 0/ 000/ 00/ 00/ 00 000, 000 00, 00 00, 00 00. 000 0000 0
000:	1 _ / 10 58.5 40 32.5
00000 000:	3300[/1x20" [][][] 6600[/1x40 [][][]

Product Pictures















ANTI-STATIC PETROL AND CHEMICAL RESISTANT



ANTI-NAIL MIDSOLE









Company Information








TIGER MASTER OFFICE SHOW





TIGER MASTER SAMPLE ROOM



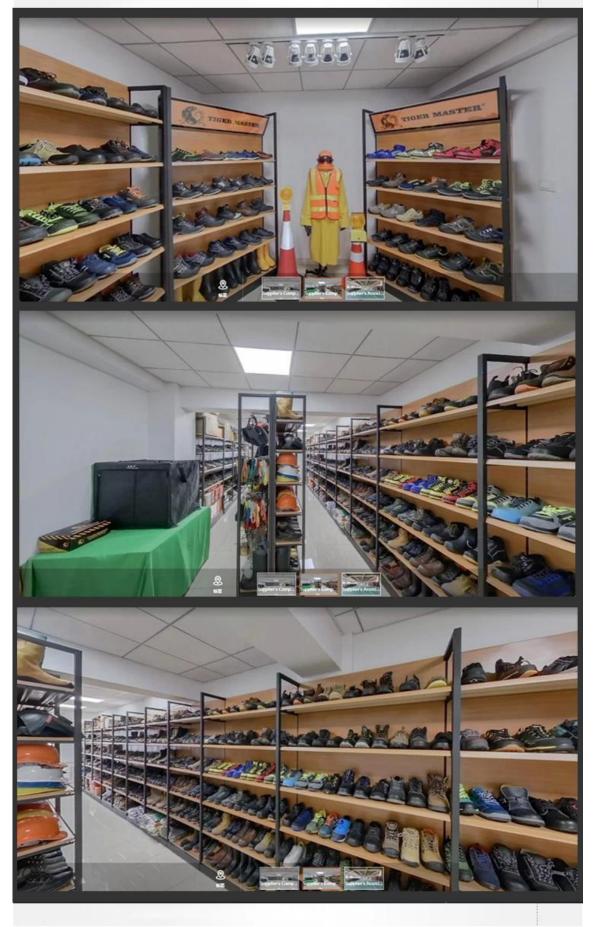

SAFETY SHOES TEST





Toecap Test≥200 Joules



Midsole Test≥1200 Newtons



ESD Anti-Static Test



Tear Strength ≥120N



Bondness Test ≥4.0N/mm



Flex Tester ≥ 36,000T

Canton Fair





SAFETY SHOES



RAIN BOOTS





PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY