

## Product Description

اسم المنتج:	تمنع اصبع القدم من الانزلاق الصلب عمل الأحذية TIGER MASTER
رقم العنصر:	0266
العلوي والوحيد:	العلوي: جلد نوبوك سيليت المزدوجة PU / PU وحيد: كثافة
إصبع قدم:	1. إصبع القدم الصلب لتكون مقاومة للتأثير 200 جول. 2. غير المقدمة أيضا.
منتصف النعل:	1. صفيحة فولاذية كن ثقب مقاومة 1100 نيوتن. 2. عدم يكون أيضا قدمت
وزن:	كلغ / العلاقات العامة 1.1
طوق:	بو الجلود الاصطناعية
لسان:	بو الجلود الاصطناعية
بطانة:	(قماش شبكي هوائي) ستبقى قدميك مريحة
Sockliner:	(المصبوب) يقلل بشكل كبير من الألم والتعب من العمل اليومي PU أو HI-POLY أو EVA
اعمال بناء:	PU حقن
ارتفاع:	الكاحل المنخفض
بحجم:	38-46
اساسي:	أو غيرهم كمتطلباتك CE EN ISO 20345 SB-P SRC
ضمان:	اشهر 6
وظيفة:	مقاومة للانزلاق / الزيت / التصادم / البزل ، مقاومة للكهرباء الساكنة ، مقاومة للماء ، امتصاص الصدمات
صفحة:	زوج لكل مربع اللون ، 10 أزواج في الكرتون. حجم الورق المقوى: 32.5 × 40 × 58.5 سم 1
كمية حمولة الحاوية:	3300 حاويةpairs / 1x20 6600 حاويةpairs / 1x40

## Product Pictures







***Company Information***



**Intertek**

**EC Type Examination Certificate**



**Issued to:** FUJIAN HONGJIAN SHIBAO CO., LTD.  
SHANGHAI INDUSTRIAL ZONE, JIANGNAN TOWN, NINGBO  
321117, ZHEJIANG PROVINCE, CHINA

**Authorised Representative:** HANDEHU SHANGHAI ELECTRICITY APPL. CO., LTD.  
1301 Village, Zhongyuan Road, Jiangyin District, Suzhou,  
Henan Province, China

**Date of Issue:** 11 January 2018

**Expiry Date:** 11 February 2020

**Certificate No.:** L20170002947 (extension of certificate L20170294719)

**Product Reference(s):** Safety Group:  
4850V (385V)  
4850V (385V)  
4850V (385V)  
4850V (385V)  
4850V (385V)  
4850V (385V)  
4850V (385V)  
4850V (385V)  
4850V (385V)  
4850V (385V)

**Description:**

Construction:	Indoor
Usage:	Over voltage
Material:	Over voltage
Color:	Black
Size:	4850 (385V)
Mount:	ACB
Test frequency:	Over voltage test
Test range:	385V
Category:	385V ACB

*C.M.* 1567-02947

 *P. Li* 1567-02948

Authorized Representative  
1301 Village, Zhongyuan Road,  
Jiangyin District, Suzhou,  
Henan Province, China

Intertek Testing Services (UK) Limited  
1567-02947



# Production Process



Raw Materials



Punching



Cutting



Riveting



Eyeletting



Sewing



Heat - Setting



Molding



Making up



Finished Goods



Packing



Inspection

# SAFETY SHOES TEST



**Toecap Test  $\geq 200$  Joules**



**Midsole Test  $\geq 1200$  Newtons**



**ESD Anti-Static Test**



**Tear Strength  $\geq 120$ N**



**Bondness Test  
 $\geq 4.0$ N/mm**



**Flex Tester  $\geq 36,000$ T**

# SHOES MATERIALS



**Genuine Cow Leather**




**CE Steel Toecap**



**CE Steel Plate**



**Composite Toecap**

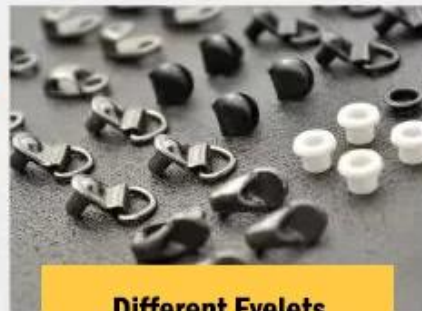

**Different Eyelets**



**Durable Lace**



**Breathable Lining**



**Comfortable Insoles**



**PU or RUBBER or TPU soles**



# Canton Fair



## SAFETY SHOES



## RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY