


Product Description

Material	Non-slip
Color	3096.
Material	Non-slip EVA
Material	Non-slip 200 ASTM F2413-18 M I / 75 C / 75 CE EN ISO 20345 Non-slip
Material	Non-slip 1100 ASTM F2413-18 M I / 75 C / 75 CE EN ISO 20345 Non-slip
Material	CE EN ISO 20345 SBP SRC
Material	Non-slip
Material	Pu
Material	Non-slip
Material	Non-slip
Material	EVA Hi-Poly PU
Material	Non-slip
Material	Non-slip
Material	38-46
Material	6. Non-slip
Material	S. Non-slip
Material	Non-slip 10 Non-slip 58.5 x 40 x 32.5 cm
Material	3300PAIR / 1x20' 6600PAIR / 1x40'

Product Pictures



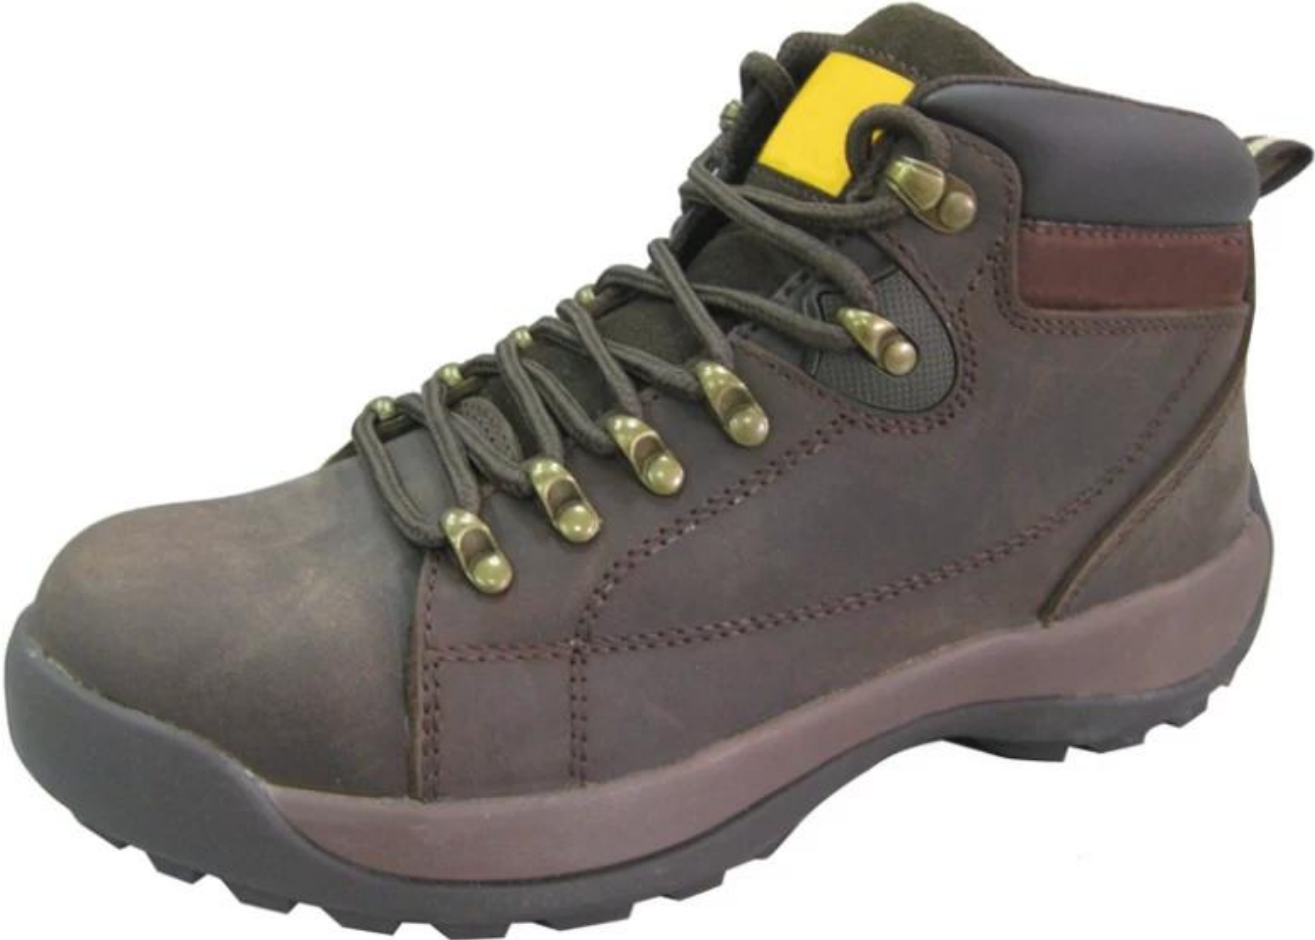

SAFETY SHOES TEST



Toecap Test ≥ 200 Joules



Midsole Test ≥ 1200 Newtons



ESD Anti-Static Test



Tear Strength ≥ 120 N



**Bondness Test
 ≥ 4.0 N/mm**



Flex Tester $\geq 36,000$ T

Canton Fair



SAFETY SHOES



RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY