

Product Description

Model	6001
Material	1. PU / PU non
Weight	1. 200g
Dimensions	1. 1100 mm 2. 1100 mm
Thickness	1.0 mm
Color	Black
Material	PU
Material	EVA + PU
Material	PU
Material	PU
Material	38-46
Material	CE EN ISO 20345 S3 SRC
Material	6
Material	100% PU / PU non
Material	100% PU / PU non 58.5 x 40 x 32.5
Material	3300pairs / 1x20' PU 6600pairs / 1x40' PU

Product Pictures





Company Information



Intertek

EC Type Examination Certificate



Issued to: FUJIAN HONGJIAN SHISE CO., LTD.
SHANGHAI INDUSTRIAL ZONE, JIANGNAN TOWN, NINGBO
321117, ZHEJIANG PROVINCE, CHINA

Authorised Representative: HANDEHU SHANGHAI ELECTRICITY APPL. CO., LTD.
1201 Village, Xujiahui Town, Xujiahui Street, Shanghai
Pudong District, China

Date of Issue: 11 January 2018

Expiry Date: 11 February 2020

Certificate No.: L20170002947 (extension of certificate L20170004199)

Product Reference(s): Safety Group:
4800V (380V)
4800V (380V)
4800V (380V)
4800V (380V)
800V (240V-250V)

Description:

Construction:	Insulation
Terminal:	Open terminal
Material:	Open wire
Core:	0.50
Wire:	0.50 (PVC)
Mark:	AC0
Test frequency:	See national file
Test range:	0.5A
Category:	00P-01A

C.M. 1687-02018

 **Product Approval** 1687-02018

Intertek Testing Services (UK) Limited, 35 Littleport Way, Lutterworth, Leicestershire, LE15 177, UK



Production Process



Raw Materials



Punching



Cutting



Riveting



Eyeletting



Sewing



Heat - Setting



Molding



Making up



Finished Goods



Packing



Inspection

SAFETY SHOES TEST



Toecap Test ≥ 200 Joules



Midsole Test ≥ 1200 Newtons



ESD Anti-Static Test



Tear Strength ≥ 120 N



**Bondness Test
 ≥ 4.0 N/mm**



Flex Tester $\geq 36,000$ T

SHOES MATERIALS



Genuine Cow Leather




CE Steel Toecap



CE Steel Plate



Composite Toecap

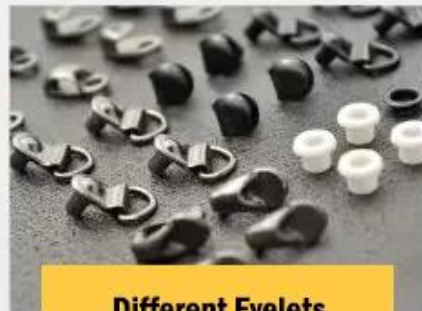

Different Eyelets



Durable Lace



Breathable Lining



Comfortable Insoles



PU or RUBBER or TPU soles

Canton Fair



SAFETY SHOES



RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY