Product Description

00000	
000	706.
00000	
	□□□□□□□□□□1100□□□ □ASTM F2413-18 M I / 75 C / 75□CE EN ISO 20345□□□ □□□□□□□
	CE EN ISO 20345 S1P SRC
000000	3d
	□□906g
000	□□EVA□Hi-Poly□PU
000	
000	
000	38-46
	6. 🖂
	S.0/0/00/0000000000000
	□□□□1□□□□□10□□□□□58.5 x 40 x 32.5 cm
0000000	3300PAIR / 1x20'□□ 6600PAIR / 1x40'□□

Product Pictures






Light Weight



Breathable

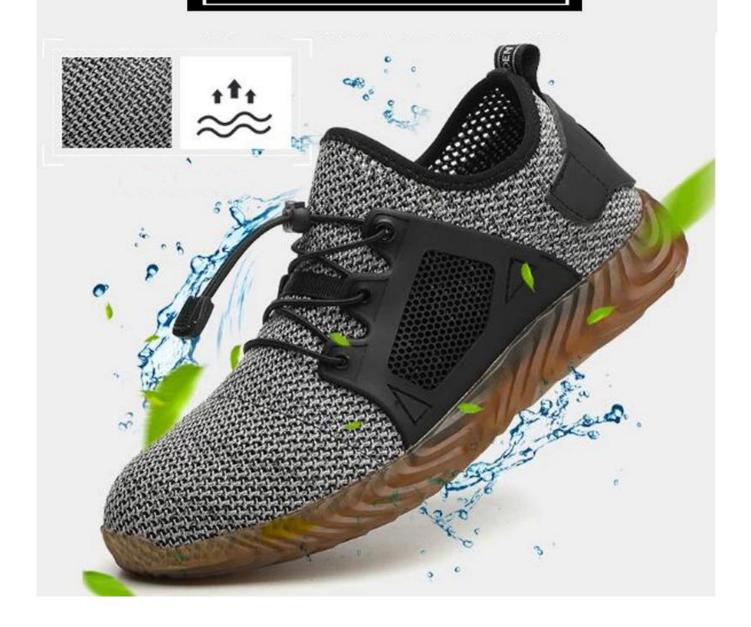

SAFETY SHOES TEST





Toecap Test≥200 Joules



Midsole Test≥1200 Newtons



ESD Anti-Static Test



Tear Strength ≥120N



Bondness Test ≥4.0N/mm



Flex Tester ≥ 36,000T

Canton Fair





SAFETY SHOES



RAIN BOOTS





PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY