

□□□□	□□PU□□□□□□□□
□□□	144B
□□□□□□	□□□□□□PU□□□□□□
□□□	1.□□□□□□□□□□ □ASTM F2413-05 M I / 75 C / 75□CE ENISO 20345□□□□□□ □□ □□□□□□
	□□□2.□□□□□□
□□□ □ □□□□□□	1.□□□□□□□□□□ □ASTM F2413-05 M I / 75 C / 75□CE ENISO 20345□□□□□□□□□□□□□□
	□□□2.□□□□
□□	PU □□□□□□□□
□□	□□□□□□□□
□□	□□□□□□□□□□
□□□	□□□□□□
□□□	PU □□□□□□□□□□□□
□□□	6□
□□□	4-12□38-46□
□□□	3□□□□□□□□□□□□□□
□□	□□□□□□□10□□□□□□□□
□□□□□	56x38x31.5cm □38-40□; 58.5x40x32.5cm□41-43□; 61x42x35cm□44-46□
□□□□□□□□	3300□/ 1X20'□□□□ 8200□/ 1x40'HQ□□□□


□□□□□□□□



□□□□□□□□



□□□□□□□□

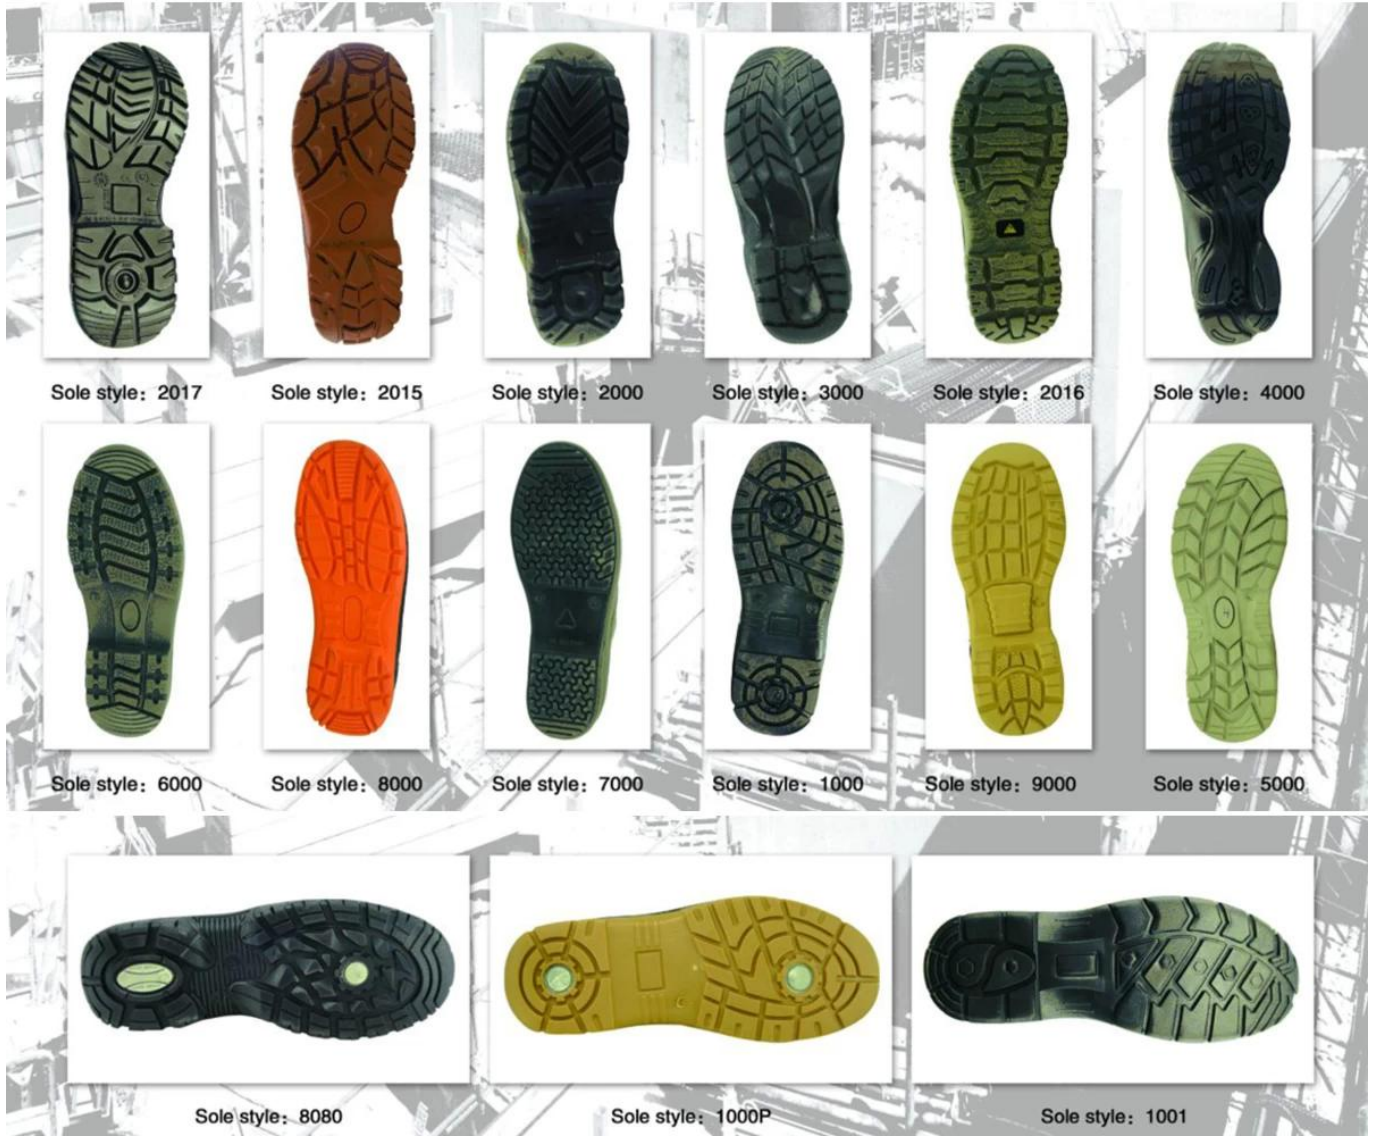

□□□□□□□□

