


|                |  |
|----------------|--|
| □□□□           | □□□□□□□□   |
| □□□            | 8055Y  |
| □□□□□□         | □□□□□□□□PU□□□□□□   |
| □□□            | 1.□□□□□□□□<br>□ASTM F2413-05 M I / 75 C / 75□CE ENISO 20345□□□□□□ □□ □□□□□ |
|                | □□□2.□□□□□   |
| □□□ □<br>□□□□□ | 1.□□□□□□□□<br>□ASTM F2413-05 M I / 75 C / 75□CE ENISO 20345□□□□□□□□□□□□□□  |
|                | □□□2.□□□   |
| □□             | PU□□□□□□□□   |
| □□             | □□□PU  |
| □□             | □□□  |
| □□□            | □□□□□  |
| □□□            | PU □□  |
| □□□            | □□□□   |
| □□□            | 4-12□38-46□  |
| □□□            | 3□□□□□□□□□□□□  |
| □□             | □□□□□□10□□□□□□   |
| □□□□           | 56x38x31.5cm □38-40□;<br>58.5x40x32.5cm□41-43□;<br>61x42x35cm□44-46□       |
| □□□□□□□        | 3300-3500pairs / 1X20'□□□<br>8200-9000pairs / 1x40'HQ□□□                   |

□□□□□□□□



□□□□□□□□□□

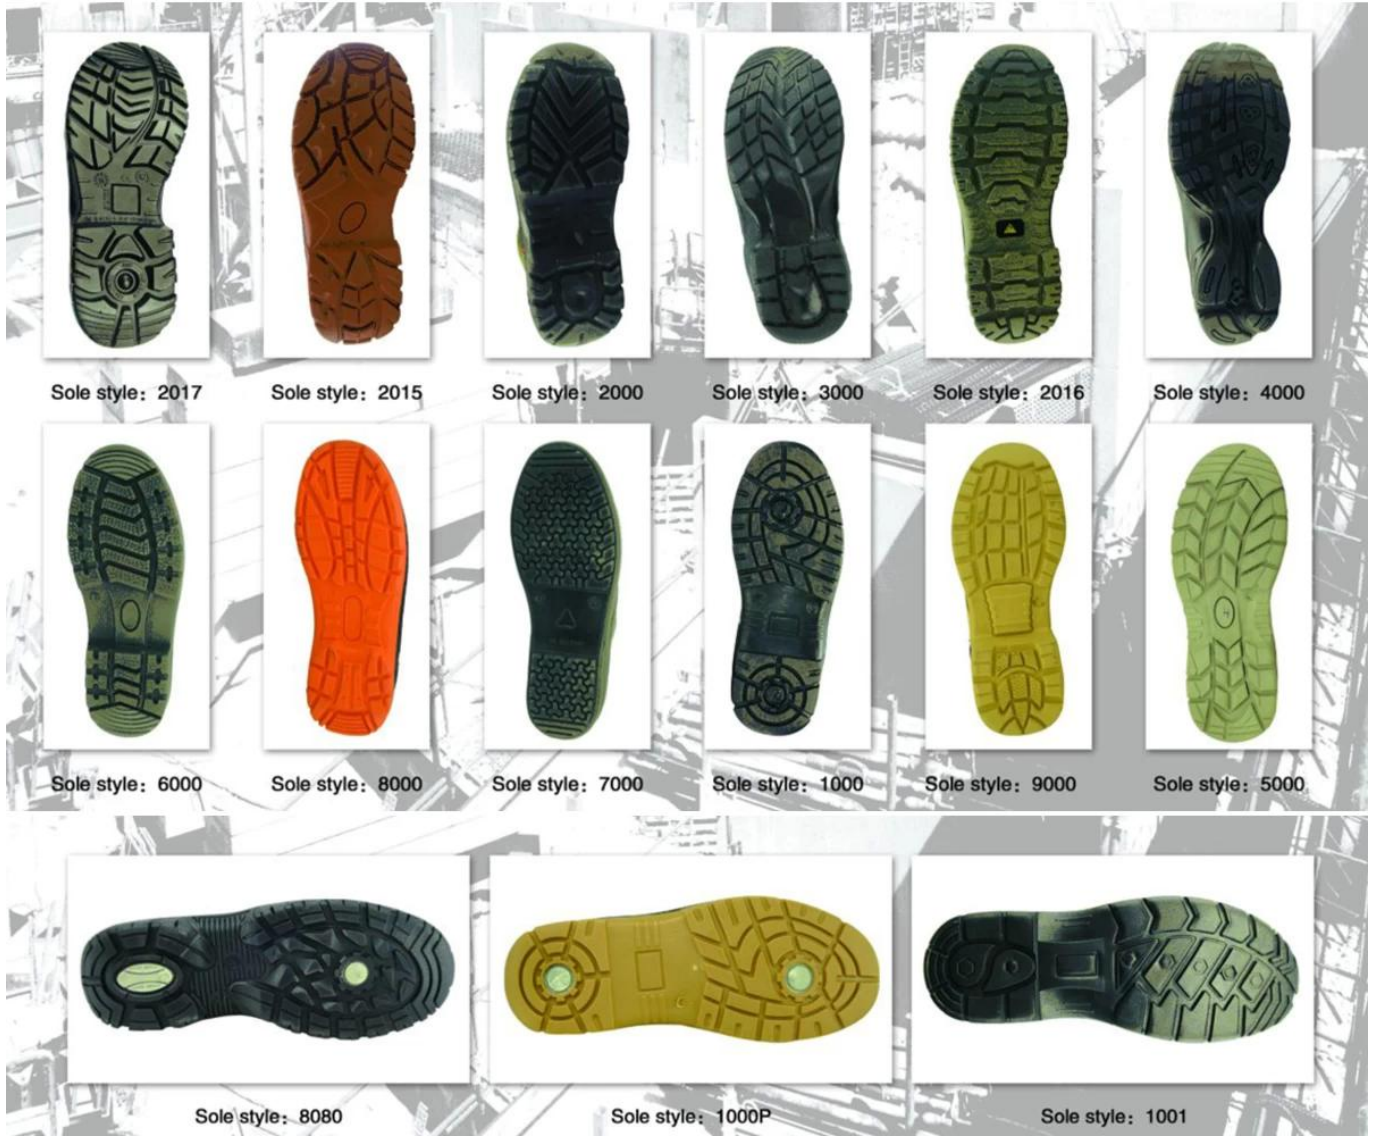

□□□□□□□□

