### Product Description


	803.
00000	0000000 000000
	□□□□□□□□□□1100□□□ □ASTM F2413-18 M I / 75 C / 75□CE EN ISO 20345□□□ □□□□□□□
	0.80/
	3d
	3d
	□□EVA□Hi-Poly□PU
000	DD36-48DD
	6. 000
000	S.0/0/00/000000000000000000000
	□□□□1□□□□□□10□□□□□58.5 x 40 x 32.5 cm
000000	3300PAIR / 1x20'□□ 6600PAIR / 1x40'□□

**Product Pictures** 








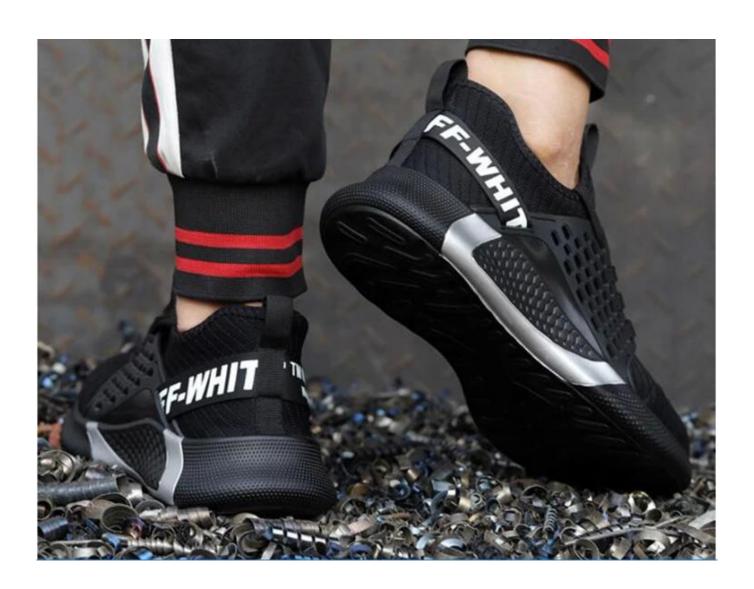




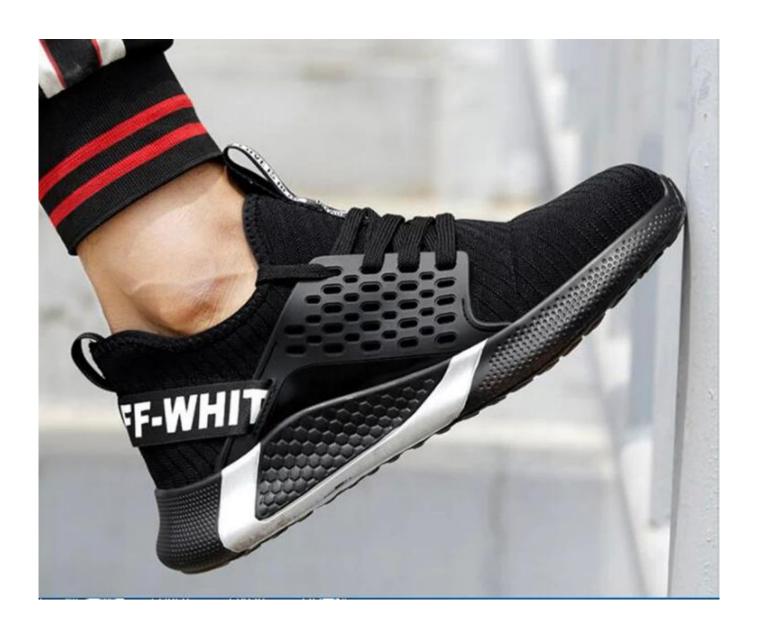





# **Production Process**

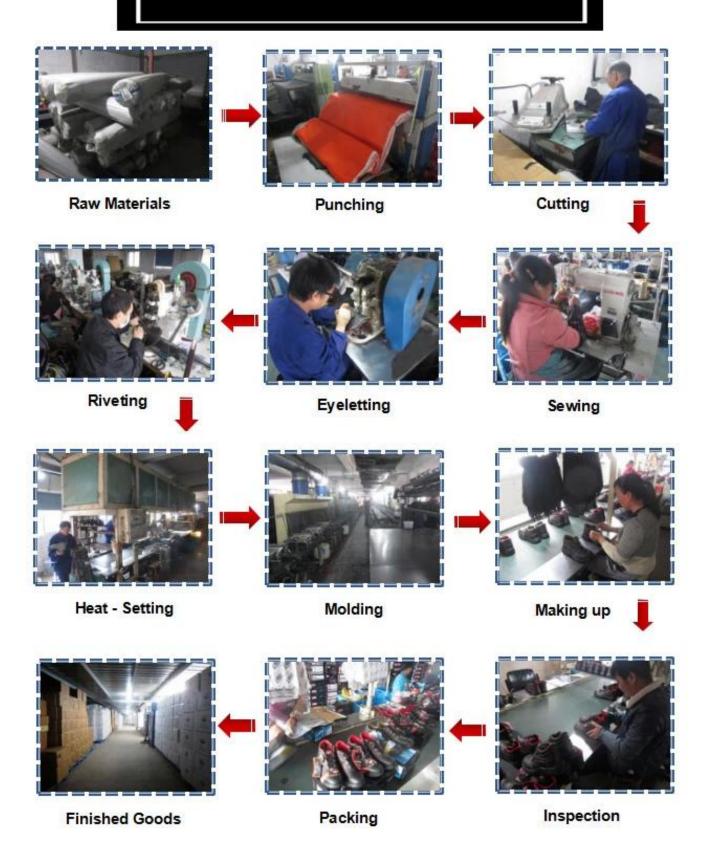

### **SAFETY SHOES TEST**





Toecap Test≥200 Joules



Midsole Test≥1200 Newtons



**ESD Anti-Static Test** 



Tear Strength ≥120N



Bondness Test ≥4.0N/mm



Flex Tester ≥ 36,000T

# Canton Fair





#### SAFETY SHOES



#### **RAIN BOOTS**





PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY