

## Product Description

CE	CE
	SJ0200BR
	PU
	1. 200 ASTM F2413-18 M I / 75 C / 75 CE EN ISO 20345
	2.
	1. 1100 ASTM F2413-18 M I / 75 C / 75 CE EN ISO 20345
	2.
	HI-POLY PU
	PU
	37-47 3-13
	6
	CE
	10 MEAS 58.5 x 40 x 32.5
	3300pairs / 1x20' 6600pairs / 1x40'

## Product Pictures





# Production Process



Raw Materials



Punching



Cutting



Riveting



Eyeletting



Sewing



Heat - Setting



Molding



Making up



Finished Goods



Packing



Inspection

# SAFETY SHOES TEST



**Toecap Test  $\geq 200$  Joules**



**Midsole Test  $\geq 1200$  Newtons**



**ESD Anti-Static Test**



**Tear Strength  $\geq 120$ N**



**Bondness Test  
 $\geq 4.0$ N/mm**



**Flex Tester  $\geq 36,000$ T**

# SHOES MATERIALS



**Genuine Cow Leather**




**CE Steel Toe cap**



**CE Steel Plate**



**Composite Toe cap**

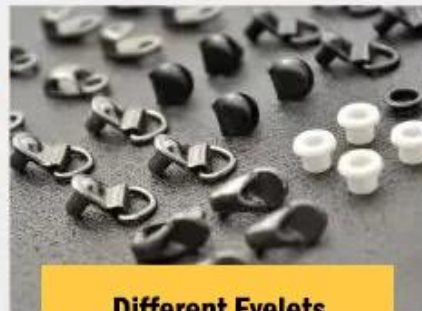

**Different Eyelets**



**Durable Lace**



**Breathable Lining**



**Comfortable Insoles**



**PU or RUBBER or TPU soles**

# Canton Fair



## SAFETY SHOES



## RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY