Product Description

	CE [] [] [] s1p
000	SU024
00000	□□□Air □□ 3D fly knit fabric & split cow leather □□□PU □□ □□□ □ □□
000	1. Composite toe cap [][] 200 Joules[]
	2. 0000 0
000	1.00 00 00 110000 000000000000000
	2. 0000
	3D [] [] []
	00 00 00 00 0 a 00 0
000	0 00 EVA 00 00 00 00 000 0000 00 0 0 0 0 0 0 0
	37-47
	CE EN ISO 20345 S1-P SRC 🛘 🖂 🖂
000	
	מם מם מם מם מםם מם מםם מם מםם מםם מםם מ
	1 00 0 00 10 0 0 00 00 58.5 X 40 X 32.5 CM
0000000	3300 /1x20"

Product Pictures









SLIP- SHOCK ABSORPTION





ANTI-STATIC PETROL AND CHEMICAL RESISTANT



ANTI-NAIL MIDSOLE



OIL RESISTANT








intertek







[PRODUCTION PROCESS]

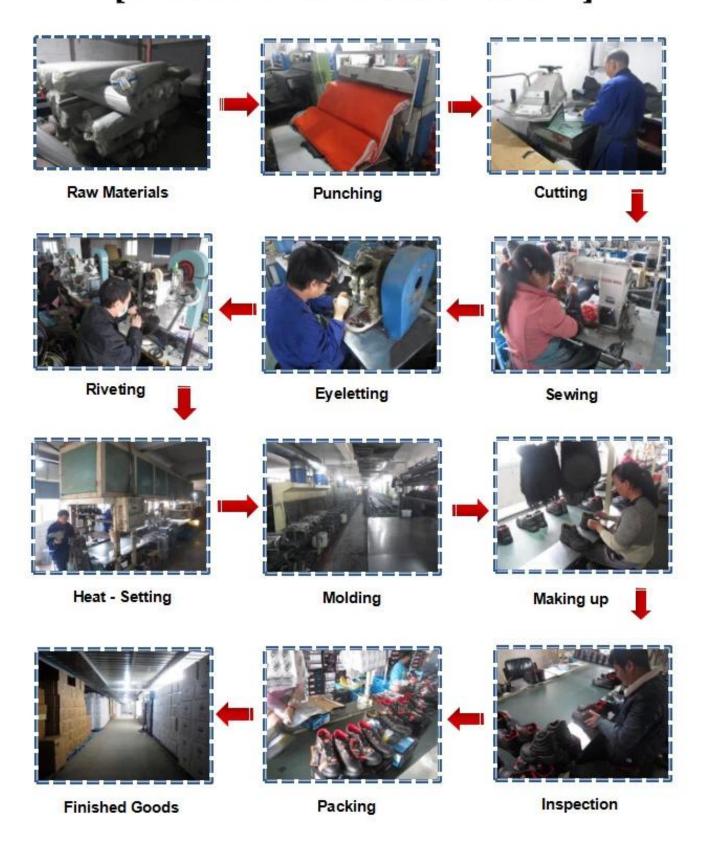

SAFETY SHOES TEST





Toecap Test≥200 Joules



Midsole Test≥1200 Newtons



ESD Anti-Static Test



Tear Strength ≥120N



Bondness Test ≥4.0N/mm



Flex Tester ≥ 36,000T

Canton Fair





SAFETY SHOES



RAIN BOOTS





PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY

2020 INTERSEC

SAFETY SHOES & RAIN BOOTS PROFESSIONAL



