Product Description

00000	
	TM028
00000	
	1. toe cap or steel toe cap
	2. 0000 0
	10000 000 00 0 00 0000 0000000000000000
	2. 🗆 🗆 🗆 🗆
	PU [] [] [] []
	PU [] []
	0000 000 EVA 00 00 000 0 000
	37-47
	CE EN ISO 20345:2011 SB-P SRC [] [][[]
000	
	00/ 0/ 00/ 00/ 00/ 00 000 00 000 000 0 00 0
	1 pairs color box□ 10pairs per carton□□□□□□ 59 x 44 x 33 cm
0000000	3300 /1×20" 6600 /1×40

Product Pictures







SLIP- SHOCK RESISTANT ABSORPTION







ANTI-STATIC PETROL AND CHEMICAL RESISTANT



ANTI-NAIL MIDSOLE



OIL RESISTANT









intertek










[PRODUCTION PROCESS]

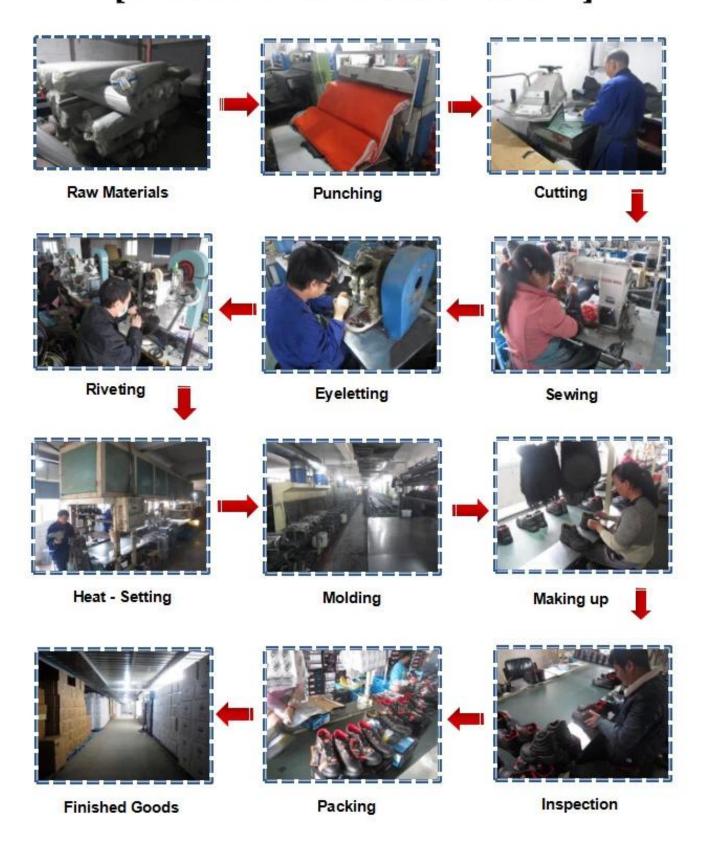

SAFETY SHOES TEST





Toecap Test≥200 Joules



Midsole Test≥1200 Newtons



ESD Anti-Static Test



Tear Strength ≥120N



Bondness Test ≥4.0N/mm



Flex Tester ≥ 36,000T

Canton Fair





SAFETY SHOES



RAIN BOOTS





PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY