Product Description

| 00000 | |
|---------|--|
| | TM113 |
| 000000 | 00000 00 000PU/ PU 0 00 00 |
| | 1. 0 00 0 000 200 0000000000000000000000 |
| | 2. 0000 0 |
| 000 | 1.0 0000 1100 000 00000000000000000 |
| | 2. 0000 |
| | PU [] [] |
| | PU [] [] & [] [] |
| | |
| | HI-POLY |
| | PU[[|
| | |
| | 38-46 |
| | CE EN ISO 20345:2011 S3 SRC [] [][[] |
| 000 | |
| | 1 pairs per c 0000000 10 00 |
| 0000 | 59 x 44 x 33 cm |
| 0000000 | 3200 [] /1×20" [] [] 6400 [] /1×40 [] [] |

Product Pictures







COMPANY INFORMATION

TIGER MASTER








TIGER MASTER SAMPLE ROOM



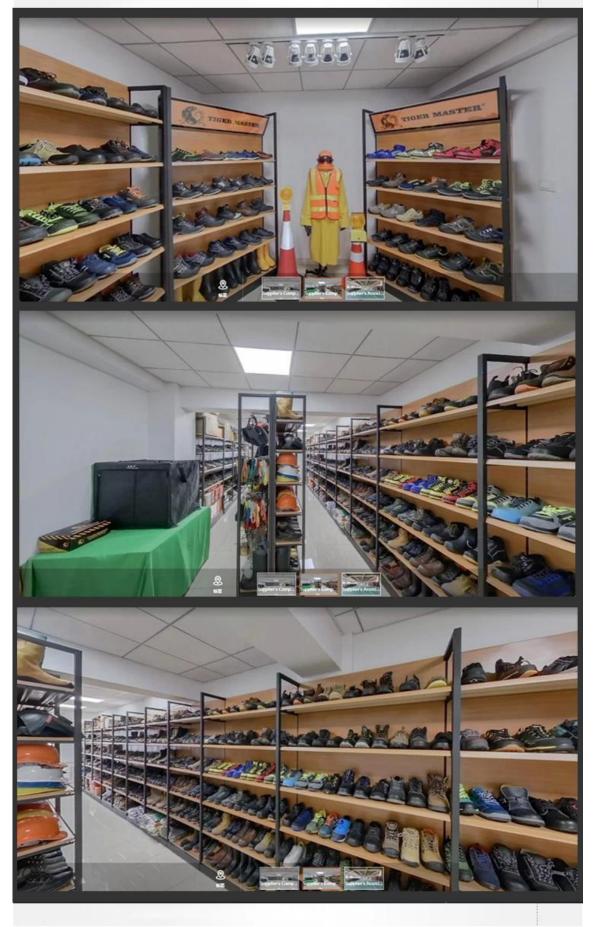

SAFETY SHOES TEST





Toecap Test≥200 Joules



Midsole Test≥1200 Newtons



ESD Anti-Static Test



Tear Strength ≥120N




Bondness Test ≥4.0N/mm



Flex Tester ≥ 36,000T

Production Process

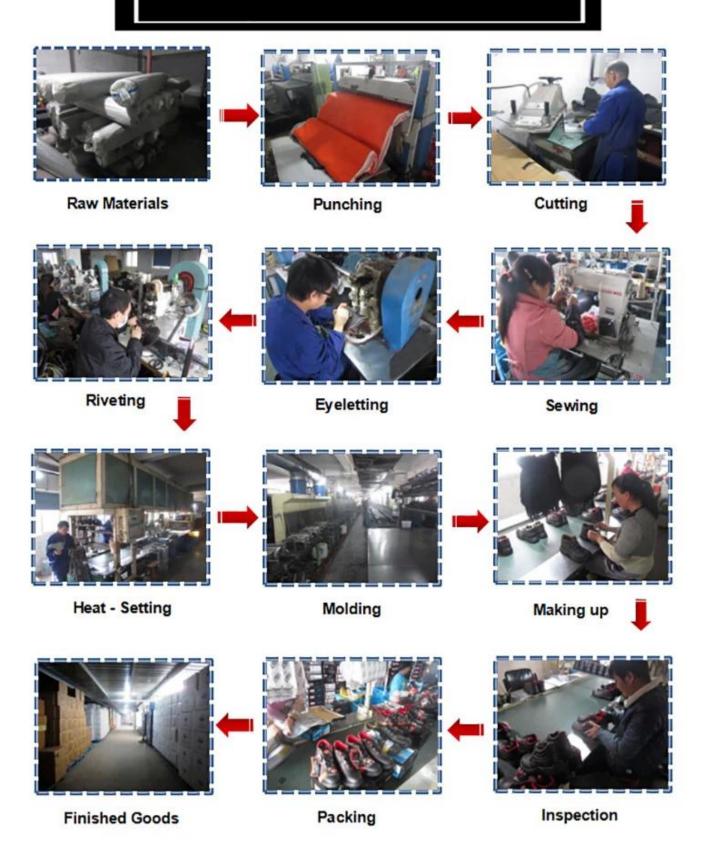

Canton Fair





SAFETY SHOES



RAIN BOOTS





PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY

PERSONAL PROTECTIVE EQUIPMENT WORK SAFETY SOLUTION PROVIDER























