Product Description

[illegible]	[illegible]
[illegible]	TM7002
[illegible]	[illegible] [illegible]PU[illegible]
[illegible]	[illegible]200[illegible] [illegible]ASTM F2413-18 M I / 75 C / 75[illegible]CE EN ISO 20345[illegible] [illegible]
[illegible]	[illegible]1100[illegible] [illegible]ASTM F2413-18 M I / 75 C / 75[illegible]CE EN ISO 20345[illegible] [illegible]
[illegible]	1.60 kgs / pr
[illegible]	[illegible]
[illegible]	[illegible]
[illegible]	[illegible]
[illegible]	[illegible]
[illegible]	[illegible]
[illegible]	PU[illegible]
[illegible]	[illegible]
[illegible]	[illegible]38-46
[illegible]	6 [illegible]
[illegible]	Ø[illegible]
[illegible]	[illegible]1[illegible]10[illegible]58.5 x 40 x 32.5 cm
[illegible]	3300pairs / 1x20'[illegible] 6600pairs / 1x40’[illegible]

Product Pictures

TIGER MASTER

TIGER
MASTER

SAFETY SHOES TEST

Toecap Test≥200 Joules

Midsole Test≥1200 Newtons

ESD Anti-Static Test

Tear Strength ≥120N

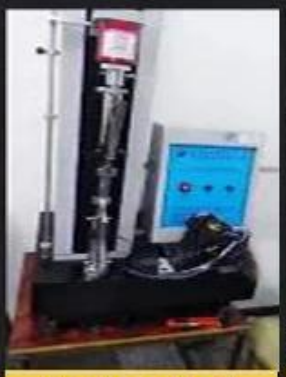

Bondness Test
≥4.0N/mm

Flex Tester ≥ 36,000T

Canton Fair

SAFETY SHOES

RAIN BOOTS

PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY