

## Product Description

Nombre del producto:	Zapatos de seguridad antideslizantes con punta de acero a prueba de pinchazos de cuero sin encaje
Artículo No:	HA5020
Parte superior y suela:	Parte superior: cuero de vaca dividido corregido Suela: PU / PU de doble densidad
Dedo del pie:	1. Puntera de acero resistente a los impactos de 200 julios. 2. non también se proporciona.
Entresuela:	1) Placa de acero para ser punción resistente 1100 Newton. 2) No es además previsto
Peso:	1.1 kilogramos / pr
Estilo:	Sin encaje, con gore elástico de doble cara.
Recubrimiento:	Tejido de malla de aire, mantendrá sus pies cómodos
Plantillas:	Malla EVA + moldeada u otras
Construcción:	Inyección de PU
Altura:	Corte medio
Talla:	EUR 38-46
Estándar:	CE EN ISO 20345 SB-P SRC u otros como sus requisitos
Garantizar:	6 meses
Función:	Resbalón / aceite / impacto / punción resistente, antiestático, a prueba de agua, absorción de impactos
Paquete:	1 par por caja de color, 10 pares por caja. Tamaño del cartón: 59 x 44 x 33 cm
Cantidad de carga del contenedor:	3300 pares / 1x20 'contenedor 6600 pares / contenedor 1x40 '

## Product Pictures







## ***Company Information***



**Intertek**

### EC Type Examination Certificate



**Issued to:** FUJIAN HONGJIAN SHISEI CO., LTD.  
SHANGHAI INDUSTRIAL ZONE, JIANGNAN TOWN, NINGBO  
321117, ZHEJIANG PROVINCE, CHINA

**Authorised Representative:** HANDEHU NEW SAFETY PRODUCTS APLC (S) LTD.  
1201 Village, North Zone, Jiangyin District, Suzhou,  
Henan Province, China

**Date of Issue:** 11 January 2018

**Expiry Date:** 11 February 2020

**Certificate No.:** L20170002947 (extension of certificate L20170294719)

**Product Reference(s):** Safety Plug:  
4800V 10A/15A  
4800V 10A/20A  
4800V 10A/25A  
4800V 10A/30A  
4800V 10A/35A  
4800V 10A/40A

**Description:**

Construction:	Insulation
Terminal:	Open contact
Material:	Open slot
Lead:	0.05
Wire:	4000 (PVC)
Mount:	ACB
Test frequency:	See national file
Test range:	20-40
Category:	009-010

*C.M.* 1587-0219

 *P. Li* 1587-0219

Authorised Representative  
1201 Village, North Zone, Jiangyin District, Suzhou,  
Henan Province, China

Intertek Testing Services (UK) Limited  
11, Woodhouse Road, Lutterworth, Leicestershire, LE17 4BQ, UK





# Production Process



Raw Materials



Punching



Cutting



Riveting



Eyeletting



Sewing



Heat - Setting



Molding



Making up



Finished Goods



Packing



Inspection

# SAFETY SHOES TEST



**Toecap Test  $\geq 200$  Joules**



**Midsole Test  $\geq 1200$  Newtons**



**ESD Anti-Static Test**



**Tear Strength  $\geq 120$ N**



**Bondness Test  
 $\geq 4.0$ N/mm**



**Flex Tester  $\geq 36,000$ T**



# SHOES MATERIALS



**Genuine Cow Leather**




**CE Steel Toecap**



**CE Steel Plate**



**Composite Toecap**

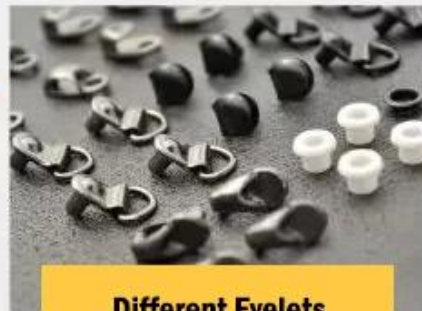

**Different Eyelets**



**Durable Lace**



**Breathable Lining**



**Comfortable Insoles**



**PU or RUBBER or TPU soles**



# Canton Fair



## SAFETY SHOES



## RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY