Product Description

Nombre del producto:	Botas S3 SRC High Rigger
Artículo No:	TM5009
Arriba y suela:	Superior: Cuero de vaca dividida en relieve Suela: PU / PU Suela de densidad dual
Dedo del pie:	1. Tapa de punta de acero para ser resistentes a los 200 julios resistentes al impacto.
	2. También se proporciona punta de acero.
Misuela:	1. Placa de acero para ser resistente a la punción 1100 Newton.
	2. También se proporciona una placa de acero.
Collar y lengua:	Sin collar
estilo:	Sin botas de soldadura de encaje
Recubrimiento:	Tela de malla aérea (se mantendrá a los pies cómodos)
Sockliner:	EVA moldeado antiestático recubierto con tejido de malla aérea u otros como sus requisitos (reducir enormemente los pies de dolor y fatiga del trabajo diario)
Construcción:	Inyección de PU
Altura:	29-30 cm
Tamaño:	38-47
Estándar:	CE EN ISO 20345: 2011 S3P SRC
Garantía:	6 meses
Paquete:	Embalaje de caja interior color, 10 pares en una caja de cartón.
Tamaño del cartón	68 x 65 x 34.5 cm
Cantidad de carga de contenedor:	Contenedor de 1800 pares / 1x20 ' Contenedor de 3600 pares / 1x40 '

Product Pictures

Production Process

Raw Materials

Punching

Cutting

Sewing

Eyeletting

Riveting

Heat - Setting

Molding

Making up

Inspection

Packing

Finished Goods

Canton Fair

SAFETY SHOES

RAIN BOOTS

PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY

SAFETY SHOES TEST

Toecap Test≥200 Joules

Midsole Test≥1200 Newtons

ESD Anti-Static Test

Tear Strength ≥120N

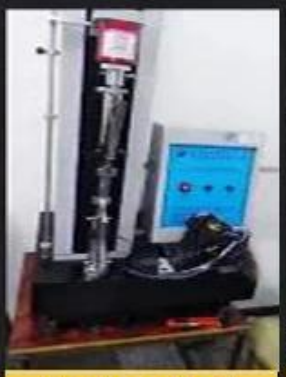

Bondness Test
≥4.0N/mm

Flex Tester ≥ 36,000T