

Product Description

Nom du produit:	Chaussures de sécurité sport respirantes en cuir suédé à semelle en PU
Numéro d'article:	DTA038
Tige et semelle:	Empeigne: cuir suédé Semelle: PU / PU double densité delta plus semelle
Doigt de pied:	1. Embout en acier, il peut être résistant aux chocs 200 Joules. 2. non est également fourni.
Semelle intermédiaire:	1. Plaque d'acier, ça peut être crevaison résistant 1100 newton. 2. Non est aussi à condition de
Poids:	1,1 kg / pr
Collier:	Daim
Langue:	Daim
Garniture:	Tissu en maille Air sandwich (Vos pieds resteront au sec et confortables)
Semelle intérieure:	EVA moulé ou HI-POLY ou PU (Réduit considérablement la douleur et la fatigue du travail quotidien)
Construction:	Injection PU
La taille:	Cheville basse
Taille:	37-47 (3-13)
La norme:	CE EN ISO 20345 SB-P SRC ou autres selon vos besoins
Garantie:	6 mois
Paquet:	1 paire par cemballage intérieur de boîte d'olor, 10 paires par carton.
Taille du carton	58,5 x 40 x 32,5 cm
Charger la quantité de conteneur:	3300 paires / 1x20 'conteneur Conteneur 6600 paires / 1x40 '

Product Pictures





Company Information





EC Type Examination Certificate

CE	Issued to:	FUXUN HONGKUN SHIBAO CO., LTD. SHANGHAI INDUSTRIAL ZONE, JIANGNAN TOWN, NUSUN DISTRICT, SHANGHAI PROVINCE, CHINA																				
	Authorised Representative:	Intertek Asia SAFETY PRODUCTS APC (S) LTD 1201 Village Square Street, Jersey Science Centre, Singapore 139673, CHINA																				
	Date of Issue:	13 January 2018																				
	Expiry Date:	13 February 2020																				
	Certificate No.:	LEC170000247 (extension of certificate LEC170247194)																				
	Product Reference(s):	Safety Group: 4800V (480V) 4800V (480V) 4800V (480V) 4800V (480V) 4800V (480V) 4800V (480V)																				
	Description:	<table border="0"> <tr> <td>Construction:</td> <td>Insulation</td> </tr> <tr> <td>Terminal:</td> <td>Open socket</td> </tr> <tr> <td>Material:</td> <td>Open plate</td> </tr> <tr> <td>Core:</td> <td>SCC</td> </tr> <tr> <td>Lead:</td> <td>4000 (400V)</td> </tr> <tr> <td>Size:</td> <td>4000</td> </tr> <tr> <td>Mount:</td> <td>ACB</td> </tr> <tr> <td>Test frequency:</td> <td>See manufacturer file</td> </tr> <tr> <td>Test range:</td> <td>30-40</td> </tr> <tr> <td>Category:</td> <td>SEP-ATA</td> </tr> </table>	Construction:	Insulation	Terminal:	Open socket	Material:	Open plate	Core:	SCC	Lead:	4000 (400V)	Size:	4000	Mount:	ACB	Test frequency:	See manufacturer file	Test range:	30-40	Category:	SEP-ATA
Construction:	Insulation																					
Terminal:	Open socket																					
Material:	Open plate																					
Core:	SCC																					
Lead:	4000 (400V)																					
Size:	4000																					
Mount:	ACB																					
Test frequency:	See manufacturer file																					
Test range:	30-40																					
Category:	SEP-ATA																					
																						
																						
	Issued at Shanghai, P.R. of China on behalf of IEC Testing Services (S) Ltd (Intertek)																					



Production Process



Raw Materials



Punching



Cutting



Riveting



Eyeletting



Sewing



Heat - Setting



Molding



Making up



Finished Goods



Packing



Inspection

SAFETY SHOES TEST



Toecap Test ≥ 200 Joules



Midsole Test ≥ 1200 Newtons



ESD Anti-Static Test



Tear Strength ≥ 120 N



Bondness Test ≥ 4.0 N/mm



Flex Tester $\geq 36,000$ T

SHOES MATERIALS



Genuine Cow Leather




CE Steel Toecap



CE Steel Plate



Composite Toecap

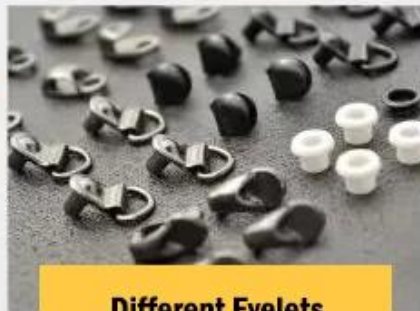

Different Eyelets



Durable Lace



Breathable Lining



Comfortable Insoles



PU or RUBBER or TPU soles

Canton Fair



SAFETY SHOES



RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY