

Product Description

| | |
|-----------------------------------|--|
| Nom du produit: | Chaussure de sécurité de travail électrique en cuir composite antidérapant résistant à l'huile, isolation noire 18KV |
| Numéro d'article: | SDHL01 |
| Tige et semelle: | Tige: cuir de vache fendu gaufré Semelle: semelle PU / PU double densité |
| Doigt de pied: | 1. Pointe en composite, elle peut être résistante aux chocs 200 Joules. 2. non est également fourni. |
| Semelle intermédiaire: | 1. Semelles anti-pénétration non métalliques pour être crevaison résistant 1100 newton. 2. Non est aussi à condition de |
| Poids: | 1,1 kg / pr |
| Collier: | Cuir synthétique PU |
| Langue: | Cuir synthétique PU |
| Garniture: | Tissu en maille aérée (Vos pieds resteront confortables) |
| Semelle intérieure: | EVA moulé ou HI-POLY ou PU (Réduit considérablement la douleur et la fatigue du travail quotidien) |
| Construction: | Injection PU |
| La taille: | Coupe moyenne |
| Taille: | 38-46 |
| La norme: | CE EN ISO 20345 SB-P SRC ou autres selon vos besoins |
| Garantie: | 6 mois |
| Une fonction: | Antidérapant / résistant à l'huile / aux chocs / à la perforation, isolation 18KV, absorption des chocs |
| Paquet: | 1 paire par boîte de couleur, 10 paires par carton. Taille du carton: 59 x 44 x 33 cm |
| Charger la quantité de conteneur: | 3300 paires / 1x20 'conteneur 6600 paires / 1x40 'conteneur |

Product Pictures







Company Information



Intertek

EC Type Examination Certificate

CE

Issued to: FUJIAN HONGJIAN SHIWEI CO., LTD.
SHANGHAI INDUSTRIAL ZONE, JIANGNAN TOWN, NINGBO
321112, ZHEJIANG PROVINCE, CHINA

Authorised Representative: HANDEHU NEW SAFETY TECHNOLOGY APPL. CO., LTD.
1201 Village, Xuyao Town, Jiaxing District, Hangzhou
311121, ZHEJIANG PROVINCE, CHINA

Date of Issue: 11 January 2018

Expiry Date: 11 February 2020

Certificate No.: L20170002947 (extension of certificate L20170294719)

Product Reference(s): Safety Group:
48501-48603
48604-48624
48625-48634
48635-48639
890-929, 930-939

Description:

| | |
|-----------------|------------|
| Construction: | Insulation |
| Topology: | Open ended |
| Material: | Open slots |
| Core: | SI |
| Winding: | 4000 Turns |
| Mount: | AC |
| Test frequency: | 50/60 Hz |
| Test range: | 25-45 |
| Category: | SEP-01A |

Authorised Representative: *C.M.* 1587-02947
Date: 11 Jan 2018

Product Reference: 1587-02947
Date: 11 Jan 2018

Intertek
15000, 15th Street, Irvine, CA 92618, USA
© Intertek Testing Services (UK) Limited



Production Process



Raw Materials



Punching



Cutting



Riveting



Eyeletting



Sewing



Heat - Setting



Molding



Making up



Finished Goods



Packing



Inspection

SAFETY SHOES TEST



Toecap Test ≥ 200 Joules



Midsole Test ≥ 1200 Newtons



ESD Anti-Static Test



Tear Strength ≥ 120 N



Bondness Test ≥ 4.0 N/mm



Flex Tester $\geq 36,000$ T

SHOES MATERIALS



Genuine Cow Leather




CE Steel Toecap



CE Steel Plate



Composite Toecap

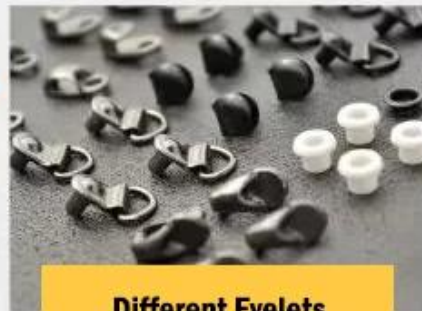

Different Eyelets



Durable Lace



Breathable Lining



Comfortable Insoles



PU or RUBBER or TPU soles

Canton Fair



SAFETY SHOES



RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY