Product Name:	Anti slip oil resistant steel toe puncture proof warehouse safety work shoes
Item No:	6505
Upper and Sole:	Upper: Suede leather & mesh fabric Sole: PU outsole, oil and slip resistant
Toe cap:	 Steel toe cap to be impact resistant 200 Joules. To protect your feet toe without hazard.
	2. non is also provided.
Midsole :	1. Non-metallic anti-penetration insoles to be puncture resistant 1100 Newton. To protect your feet without puncture by nail or sharp objects
	2. non is also provided
Collar:	Mesh fabric
Tongue:	Mesh fabric & suede leather
Lining:	Soft air mesh fabric for a comfort fit
Shoe pads:	Removable metatomical EVA or HI-POLY footbed provides long-lasting under foot support and comfort.
Construction:	Injection moulded
Height:	Low ankle
Size:	36-47
Standard:	CE EN ISO 20345 SB-P SRC or others.
Guarantee:	6 months The sole is not broken from the middle or pulled off within six month after the goods getting to destination port. No guarantee for the upper.
Function:	Oil/ acid/ petrol/ chemical/ impact/ puncture resistant, anti slip, breathable, shock absorption, anti static.
Package:	1 pair per color box, 10 pairs per carton. carton size: 58.5 x 40 x 32.5 cm
Load quantity of Container:	3300pairs /1x20' container 6600pairs /1x40' container

Product Pictures













MODEL DISPLAY









Company Information

Tiger Master is safety shoes and PVC rain boots manufacturer. We have been qualified ISO 9001:2015 quality management system. Also, some of our hot sale models have qualified CE ENISO 20345:2011 and ASTM F2413-18. Meanwhile, we are also a professional brand for **PPE** (**Personal protective equipment**), especially in the fields of safety gloves, working garments, helmets, safety vest, ear muff/plug, safety harness, rain coat/suit etc.

Thank you for your interest of Tiger Master, hope you can find the products you want and start our business cooperation. If you need more information, please do not hesitate to contact us, we are always ready here.



<section-header>


Flex Tester ≥ 36,000T

Bondness Test

≥4.0N/mm

Tear Strength ≥120N

Production Process

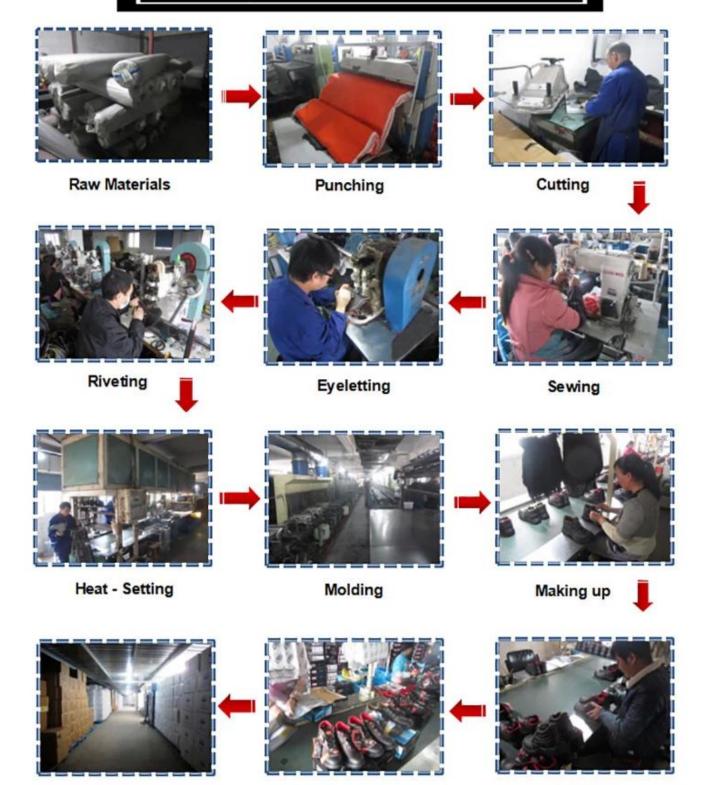

Finished Goods

Packing

Inspection

Personal Protective Equipment Work safety solution provider

