Product Description

Product Name:	Low ankle CE S3 SRC steel toe puncture proof work shoes
Item No:	TM008L
Upper and Sole:	Embossed split cow leather PU dual density sole
Toe cap:	Steel toe to be impact resistant 200 joules. (ASTM F2413-18 M I/75 C/75, CE EN ISO 20345 standard) Non steel toe is also provided.
Mid sole:	Steel plate to be puncture resistant 1100 newton. (ASTM F2413-18 M I/75 C/75, CE EN ISO 20345 standard) Non steel plate is also provided.
Eyelets:	D ring
Lace:	Durable round shoes lace
Collar:	PU artificial leather with sponge
Tongue:	PU artificial leather
Lining:	Air mesh fabric
Insoles:	Moulded EVA coated with mesh fabric or others
Construction:	PU injection
Height:	Low ankle
Size:	EUR 37-47
Guarantee:	6 months
Function:	Slip/ oil/ impact/ puncture resistant, anti static, water proof, shock absorption
Package:	1 pair per color box, 10 pairs per carton. Carton size is 58.5 x 40 x 32.5 cm
Load quantity of Container:	3300pairs /1x20' container 6600pairs /1x40' container

Product Pictures






TIGER MASTER Professional SAFETY SHOES



Production Process

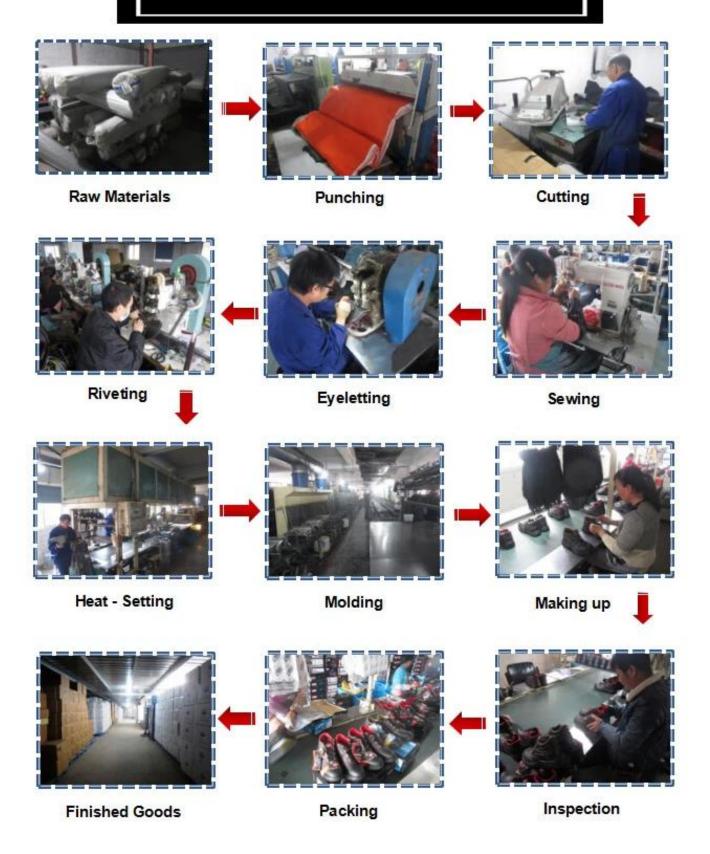

SAFETY SHOES TEST





Toecap Test≥200 Joules



Midsole Test≥1200 Newtons



ESD Anti-Static Test



Tear Strength ≥120N



Bondness Test ≥4.0N/mm



Flex Tester ≥ 36,000T

Canton Fair





SAFETY SHOES



RAIN BOOTS





PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY