Product Description


Product Name:	C2 CDC high riggery heats
	S3 SRC high rigger boots
Item No:	TM5009
Upper and Sole:	Upper: Embossed split cow leather Sole: PU/ PU dual density sole
Toe:	1. Steel toe cap to be impact resistant 200 Joules.
	2. non-steel toe is also provided.
Midsole :	1. Steel plate to be puncture resistant 1100 Newton.
	2. non- steel plate is also provided
Collar & tongue:	No collar
style:	No lace welding boots
Lining:	Air mesh fabric (it will be kept your feet comfortable)
Sockliner:	Anti static Moulded EVA coated with air mesh fabric or others as your requirements (Greatly reduce your feet pain & fatigue from daily work)
Construction:	PU injection
Height:	29-30 cm
Size:	38-47
Standard:	CE EN ISO 20345:2011 S3P SRC
Guarantee:	6 months
Package:	Color inner box packing, 10 pairs in a carton.
Carton Size	68 X 65 X 34.5 CM
Load quantity of Container:	1800pairs /1x20' container 3600pairs /1x40' container

Product Pictures





Production Process

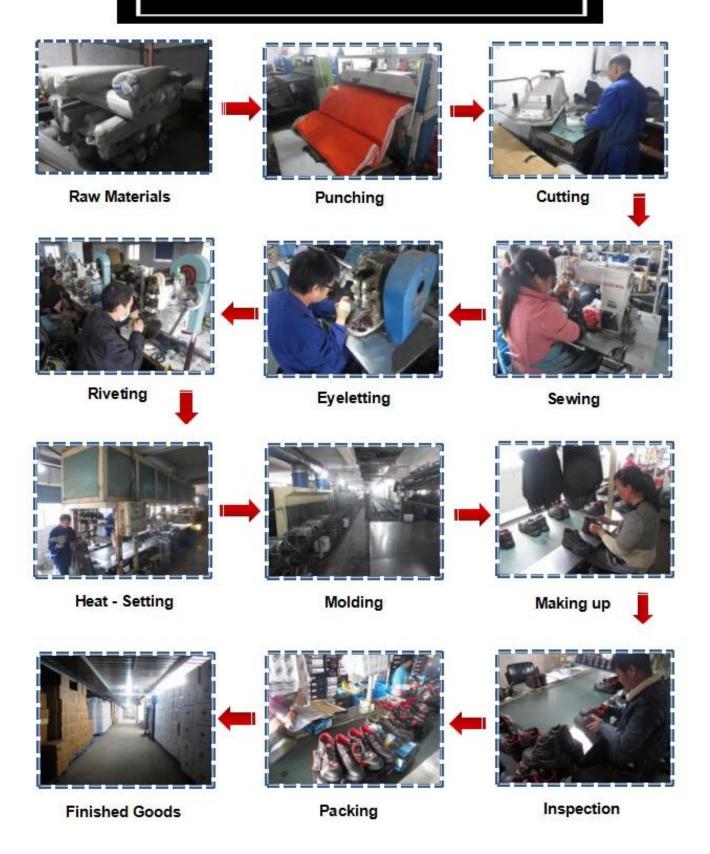

Canton Fair





SAFETY SHOES



RAIN BOOTS





PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY

SAFETY SHOES TEST





Toecap Test≥200 Joules



Midsole Test≥1200 Newtons



ESD Anti-Static Test



Tear Strength ≥120N



Bondness Test ≥4.0N/mm



Flex Tester ≥ 36,000T