

Product Description

Nome del prodotto:	Scarpe antinfortunistiche traspiranti in pelle scamosciata con suola in cuoio
Oggetto numero:	DTA038
Tomaia e suola:	Tomaia: pelle scamosciata Suola: suola PU / PU doppia densità delta plus
Dito del piede:	1. Puntale in acciaio, può essere resistente agli urti 200 Joule. 2. non è anche previsto.
Intersuola:	1. Lamiera di acciaio, può essere foratura resistente 1100 newton. 2. Non è anche fornito
Peso:	1,1 kg / pr
Collare:	Pelle scamosciata
Lingua:	Pelle scamosciata
Liner:	Tessuto a rete Air sandwich (i tuoi piedi saranno asciutti e comodi)
sockliner:	EVA o HI-POLY o PU modellati (riducono notevolmente il dolore e la fatica dal lavoro quotidiano)
Costruzione:	Iniezione PU
Altezza:	Caviglia bassa
Dimensione:	37-47 (3-13)
Standard:	CE EN ISO 20345 SB-P SRC o altri come vostre esigenze
Garanzia:	6 mesi
Pacchetto:	1 paio per confezione interna color, 10 paia per cartone.
Dimensioni della scatola	58,5 x 40 x 32,5 cm
Carica quantità di container:	Contenitore 3300pairs / 1x20 ' Contenitore 6600pairs / 1x40 '

Product Pictures





Company Information



Intertek

EC Type Examination Certificate



Issued to: FUJIAN HONGJIAN SHISECO CO., LTD.
SHANGHAI INDUSTRIAL ZONE, JINCHANG TOWN, NINGBO
321712, ZHEJIANG PROVINCE, CHINA

Authorised Representative: HANDEHU SHANGHAI ELECTRICITY APPL. CO., LTD.
1201 Village, Xuyuan Road, Jiangyin District, Suzhou,
Jiangsu Province, China

Date of Issue: 11 January 2018

Expiry Date: 11 February 2020

Certificate No.: L20170022947 (extension of certificate L20170294719)

Product Reference(s): Safety Group:
4800V (380V)
4800V (380V)
4800V (380V)
4800V (380V)
800V (230V-240V)

Description:

Construction:	Insulation
Terminal:	Open terminal
Material:	Open wire
Core:	2000
Lead:	8000 (PVC)
Sheath:	ABS
Test frequency:	See technical file
Test range:	38-45
Category:	800V-480V

C.M. 1687-0219

Product Name: 1687-0219

Intertek Testing Services (UK) Limited



Production Process



Raw Materials



Punching



Cutting



Riveting



Eyeletting



Sewing



Heat - Setting



Molding



Making up



Finished Goods



Packing



Inspection

SAFETY SHOES TEST



Toecap Test ≥ 200 Joules



Midsole Test ≥ 1200 Newtons



ESD Anti-Static Test



Tear Strength ≥ 120 N



**Bondness Test
 ≥ 4.0 N/mm**



Flex Tester $\geq 36,000$ T

SHOES MATERIALS



Genuine Cow Leather




CE Steel Toe cap



CE Steel Plate



Composite Toe cap

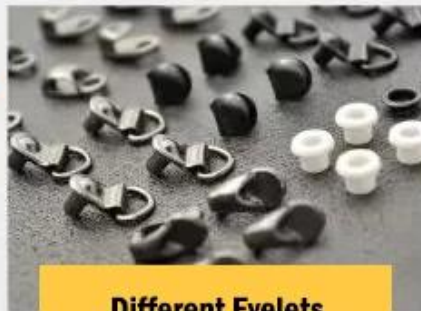

Different Eyelets



Durable Lace



Breathable Lining



Comfortable Insoles



PU or RUBBER or TPU soles

Canton Fair



SAFETY SHOES



RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY