

Product Description

Nome del prodotto:	Scarpe antinfortunistiche antidrucciolo in materiale composito antidrucciolo
Oggetto numero:	M008
Tomaia e suola:	Tomaia: pelle in microfibra Suola: PU / PU doppia densità
Dito del piede:	1. Punta composita resistente agli urti 200 Joule. 2. non è anche previsto.
Intersuola:	1. Solette non metalliche anti-penetrazione a essere foratura resistente 1100 newton. 2. Non è anche fornito
Peso:	1,0 kg / pr
Stile:	Allacciato
Liner:	Tessuto a rete traspirante, per mantenere i piedi comodi
solette:	EVA + mesh modellato o altri
Costruzione:	Iniezione PU
Altezza:	Caviglia bassa
Dimensione:	euro 38-46
Standard:	CE EN ISO 20345 S3 SRC o altri come vostre esigenze
Garanzia:	6 mesi
Funzione:	Antiscivolo / olio / impatto / antiforatura, antistatico, impermeabile, assorbimento degli urti
Pacchetto:	1 paio per scatola di colore, 10 paia per cartone. Formato della scatola: 58,5 x 40 x 32,5 cm
Carica quantità di contenitore:	Contenitore 3300pairs / 1x20 ' Contenitore 6600pairs / 1x40 '

Product Pictures





Company Information



Intertek

EC Type Examination Certificate



Issued to: FUJIAN HONGJIAN SHISEI CO., LTD.
SHANGHAI INDUSTRIAL ZONE, JIANGNAN TOWN, NINGBO
321117, ZHEJIANG PROVINCE, CHINA

Authorised Representative: HANDEHU SHANGHAI SAFETY PRODUCTS MFG. CO., LTD.
1201 Village, Xuyuan Town, Jiangyin District, Suzhou,
Henan Province, China

Date of Issue: 11 January 2018

Expiry Date: 11 February 2020

Certificate No.: L20170002947 (extension of certificate L20170004199)

Product Reference(s): Safety Valve
48501-08010
48502-08010
48503-08010
48504-08010
48505-08010
800 200 300 400

Description: Components: Inlet
Type: Direct vented
Material: Steel plate
Size: 8000
Unit: PCS (Pack)
Mount: ACS
Type Approval No: 08-01
Type Range: 08-01
Category: 089-010

C.M. 1687-0218
Date

 **Product Approval** 1687-0218
Date

Intertek Testing Services (UK) Limited, 35 Littlefield Way, Borehamwood, Hertfordshire, SG9 6ND, UK



Production Process



Raw Materials



Punching



Cutting



Riveting



Eyeletting



Sewing



Heat - Setting



Molding



Making up



Finished Goods



Packing



Inspection

SAFETY SHOES TEST



Toecap Test ≥ 200 Joules



Midsole Test ≥ 1200 Newtons



ESD Anti-Static Test



Tear Strength ≥ 120 N



**Bondness Test
 ≥ 4.0 N/mm**



Flex Tester $\geq 36,000$ T

SHOES MATERIALS



Genuine Cow Leather




CE Steel Toecap



CE Steel Plate



Composite Toecap

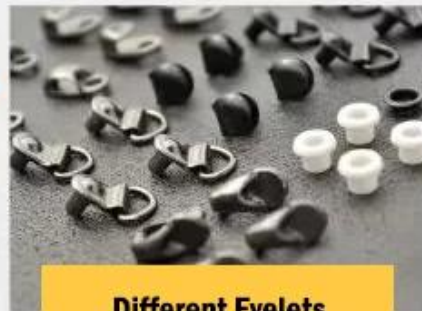

Different Eyelets



Durable Lace



Breathable Lining



Comfortable Insoles



PU or RUBBER or TPU soles

Canton Fair



SAFETY SHOES



RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY