
Product Description

	00 00 000 00 00 00 00
00 00:	605.
000 0 :	00 000 3D 00 00 000 00, 000 00 000
000 00 :	□□ □□□ □□□ □□ 200 □□□□. (ASTM F2413-18 M I / 75 C / 75, CE EN ISO 20345 □□) □□ □□□ □□□□□.
00 00 :	□□□ □□□□ □□□ □□□ 1100 Newton□ □ □□□□. (ASTM F2413-18 M I / 75 C / 75, CE EN ISO 20345 □□) □□ □□□ □□□□□.
<u> </u>	CE EN ISO 20345 SBP SRC [] [] []
□□ & □ :	3d 🖂 🖂 🖂
<u> </u>	□ □ □ 730g
<u> </u>	
Sockliner :	00 EVA 00 00 00 00 000
<u> </u>	
<u> </u>	
<u> </u>	□□ 38-46.
<u> </u>	6. 🖂
<u> </u>	
000:	□□ □□ □ 1 □, □□ □ 10 □. □□ □□□ □□□□58.5 × 40 × 32.5 cm.
0000 000 :	3300pairs / 1x20 '[][][] 6600Pairs / 1x40 '[][][]


Product Pictures





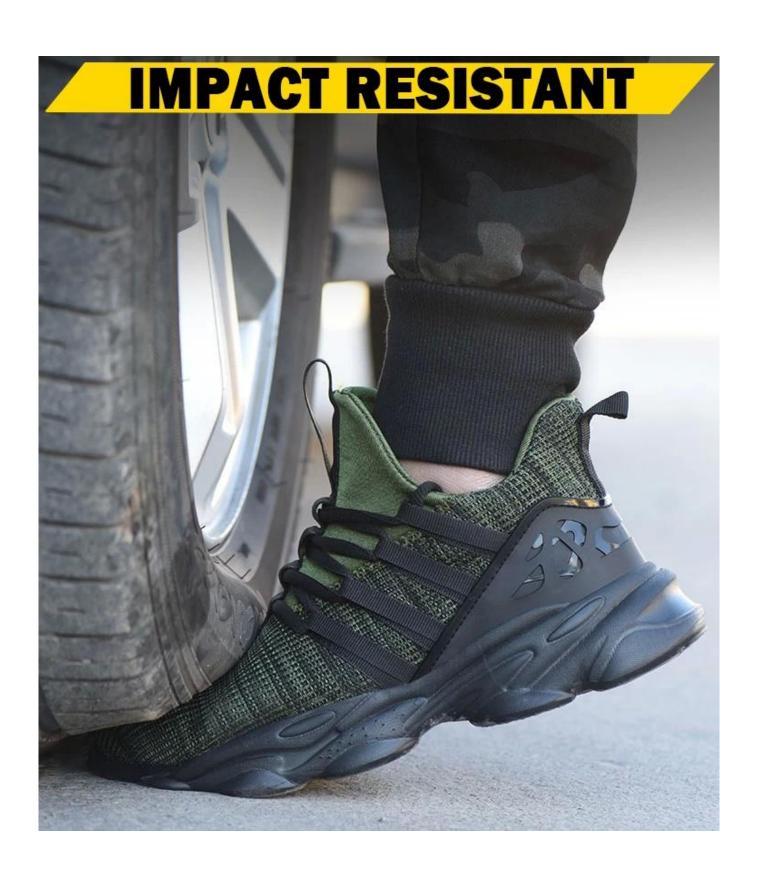



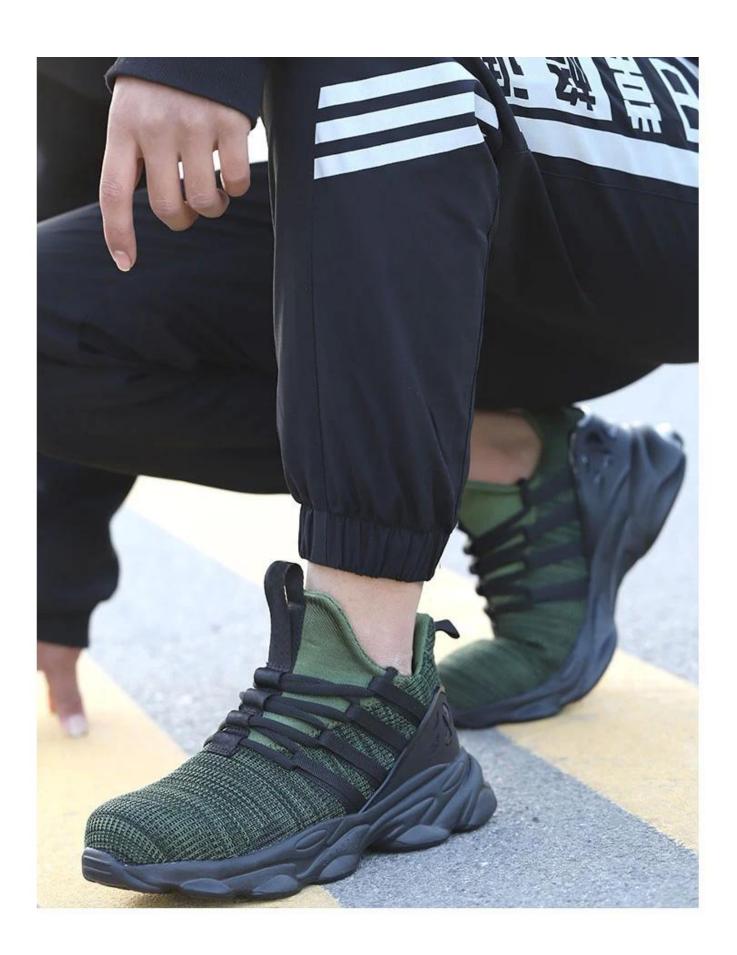



SAFETY SHOES TEST





Toecap Test≥200 Joules



Midsole Test≥1200 Newtons



ESD Anti-Static Test



Tear Strength ≥120N



Bondness Test ≥4.0N/mm



Flex Tester ≥ 36,000T

Canton Fair





SAFETY SHOES



RAIN BOOTS





PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY