

Product Description

- 此垫具有防滑、减震、透气、防水、环保、无毒、无味、无刺激性气味、无挥发性有机物(VOC)等特性。
- 适用于各种地面，如水泥地、木地板、地毯等。
- 采用环保 EVA 材料制成，安全无毒，使用寿命长。
- 厚度为 200 毫米，柔软舒适，提供良好的支撑和缓冲。
- 重量为每平方厘米 1100 克，轻便易携，便于存放。
- 3D 发泡设计，具有良好的弹性和回弹性，能有效吸收冲击力。
- 防滑性能优异，能有效防止摔倒和滑倒。
- 易于清洗，只需用水擦拭即可。
- 包装规格：
 颜色：**SB**：浅灰色，**SBP**：深灰色，**S1**：白色，**S2**：黄色，**S3**：蓝色
1：SB 颜色，**S1P**：S1 颜色，**2**：S1 颜色，**3**：S1P 颜色
- 本产品符合相关安全标准，请放心使用。如有疑问，请联系我们！

名称：	防滑减震垫
型号：	761
主要材料：	3D 发泡 EVA Soft EVA
厚度：	1. 200 毫米 2. non 毫米
重量：	1. 每平方厘米 1100 克 2. non 克
颜色：	浅灰色
防滑性能：	防滑
适用场景：	健身房、瑜伽垫、办公室、家庭使用
包装规格：	每卷重量 metatomeal 每卷 EVA 重量 每卷长度 每卷宽度
认证：	CE EN ISO 20345:2011 SB-P SRC
尺寸：	36-47
厚度：	200 毫米 / 100 毫米 / 50 毫米
重量：	每平方厘米 1100 克
包装规格：	每卷重量 每卷长度 每卷宽度 每卷厚度
尺寸：	58.5 X 40 X 32.5 CM
包装规格：	3300/1x20" 每卷 6600/1x40" 每卷

Product Pictures



200 JOULE
TOECAP



SLIP-
RESISTANT



SHOCK
ABSORPTION



ANTI-STATIC



PETROL AND
CHEMICAL
RESISTANT



ANTI-NAIL
MIDSOLE



OIL
RESISTANT







lbs

DOTHEBEST

5,400 lbs
Securing System

DOT



lbS

DOTHEBEST

5,400 lbS
curing System

DOTHI



DOTHEBEST

5,400 lbS
Securing System

DOT





01

Steel Toe

Anti-Shock Steel Toe

Steel toe cap design giving protection from dangerous falling objects

European Standard Steel Toe Cap

- ① Steel toe shoes with ASTM F2413 standard
- ② Impact resistance of 200J
- ③ AN1 Widened Steel Toe
- ④ Pressure resistance > 15KN



02

Puncture Proof

Puncture Proof Kevlar Midsole

Compared with the traditional steel plate midsole, kevlar midsole is lighter and better in anti-puncture performance

Kevlar midsole can protect your foot from injury while working



03

Anti-Slip

EVA OUTSOLE SOFT & COMFORTABLE

**Provides stronger wear-resisting,
suitable for complex pavements**



04

Breathable&Soft

Upper & Insole

Breathable & Comfortable Uppers
Compared with the traditional steel toed leather shoes , the fly weavingshoes are more breath and comfortable , and it will better fit your feet.





Breathable Mesh Upper




Anti-Odour Lining



TIGER MASTER OFFICE SHOW

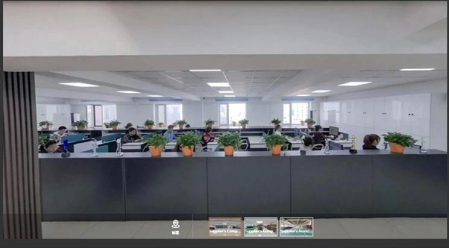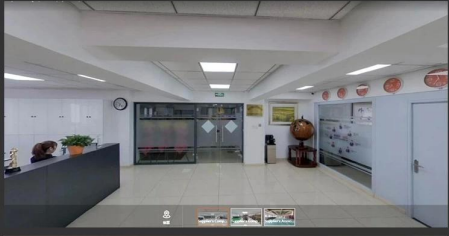

TIGER MASTER SAMPLE ROOM

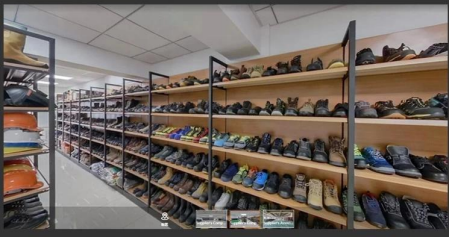

SAFETY SHOES TEST



Toecap Test ≥ 200 Joules

Midsole Test ≥ 1200 Newtons

ESD Anti-Static Test



Tear Strength ≥ 120 N

Bondness Test ≥ 4.0 N/mm

Flex Tester ≥ 36.000 T