

□□□:	□□ □□ □□□ □□ □□ □□
□□ □□:	801Y
□□□ □□ :	□□ PU□ □□ □□, PU □□ □□ □.
□□□:	1. □□ □□□ □□ □□ □□□□. (ASTM F2413-05 M I / 75 C / 75, CE ENISO 20345 □□, □□□□ □□ □□ □□□ □)
	2. □ □□ □□□□ □□□□□.
□□ : (□□ □□)	1. □□ □□ □□□ □□□□□. (ASTM F2413□-05 M I / 75 C / 75, CE ENISO 20345 □□ □□□ □□□ □□)
	2. □ □□□ □□□□
□□:	PU □□□ □□ □□□.
□:	□□□ □□□□ □□
□:	□□ □□
□□ :	□□□ □□
□□:	PU □□
□□:	□□ □
□□:	4-12 (38-46)
□□:	3□□, □□□ □□ □ □□ □□.
□□:	□□ □□ □□ □□, □□□ 10□
□□ □□	56x38x31.5cm (38 ~ 40) 58.5x40x32.5cm (41-43); 61x42x35cm (44-46)
□□□□□ □□ □□ :	3□3□□ / 1X20 '□□ 8,200□ / 1x40 'HQ □□□□

□□ □□ □□□ □□□□□








□□ □□ □□ □□ □□ :



□□ □□ □□ □□ □□ □□ :

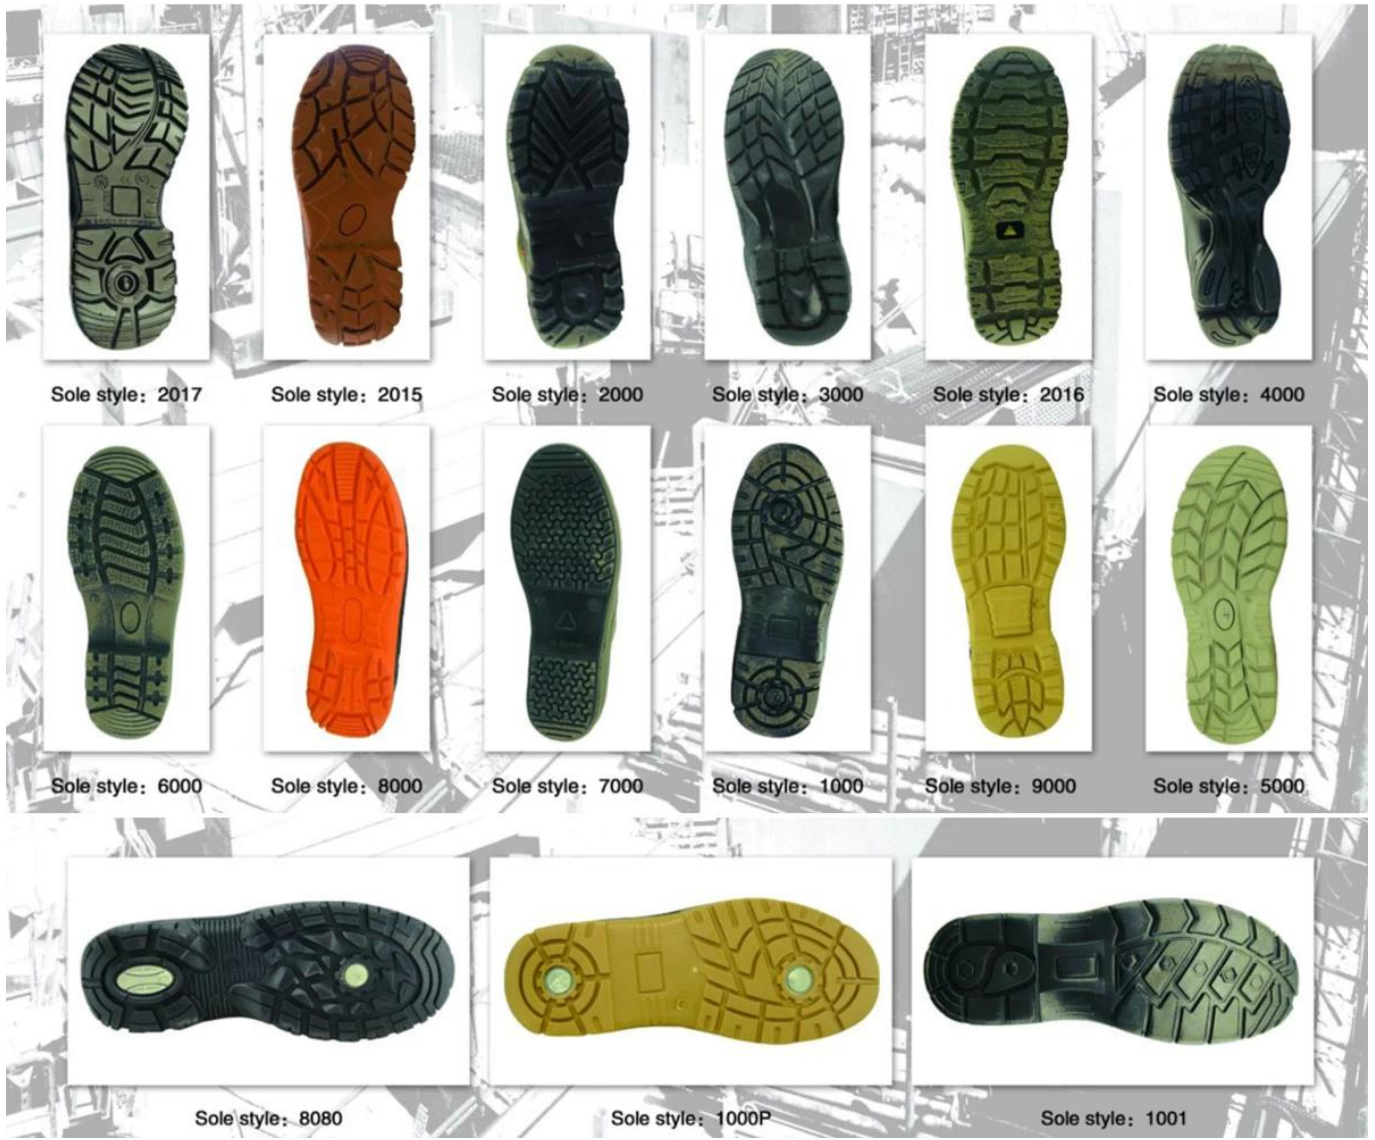

□ □ □ □ :

