


Product Description

Model:	SD3050
Material:	PU / PU
Thickness:	200 mm. (ASTM F2413-18 M I / 75 C / 75, CE EN ISO 20345)
Weight:	1100 g/m ² . (ASTM F2413-18 M I / 75 C / 75, CE EN ISO 20345)
Color:	Black
Upper:	PU
Midsole:	EVA
Insole:	PU
Outsole:	PU
Standard:	EUR 37-47
Length:	6 cm
Width:	Standard, Wide, Extra Wide
Weight:	1 kg, 10 kg. Size 59x44x33 mm
Dimensions:	3300 mm / 1x20' / 6600 mm / 1x40'

Product Pictures



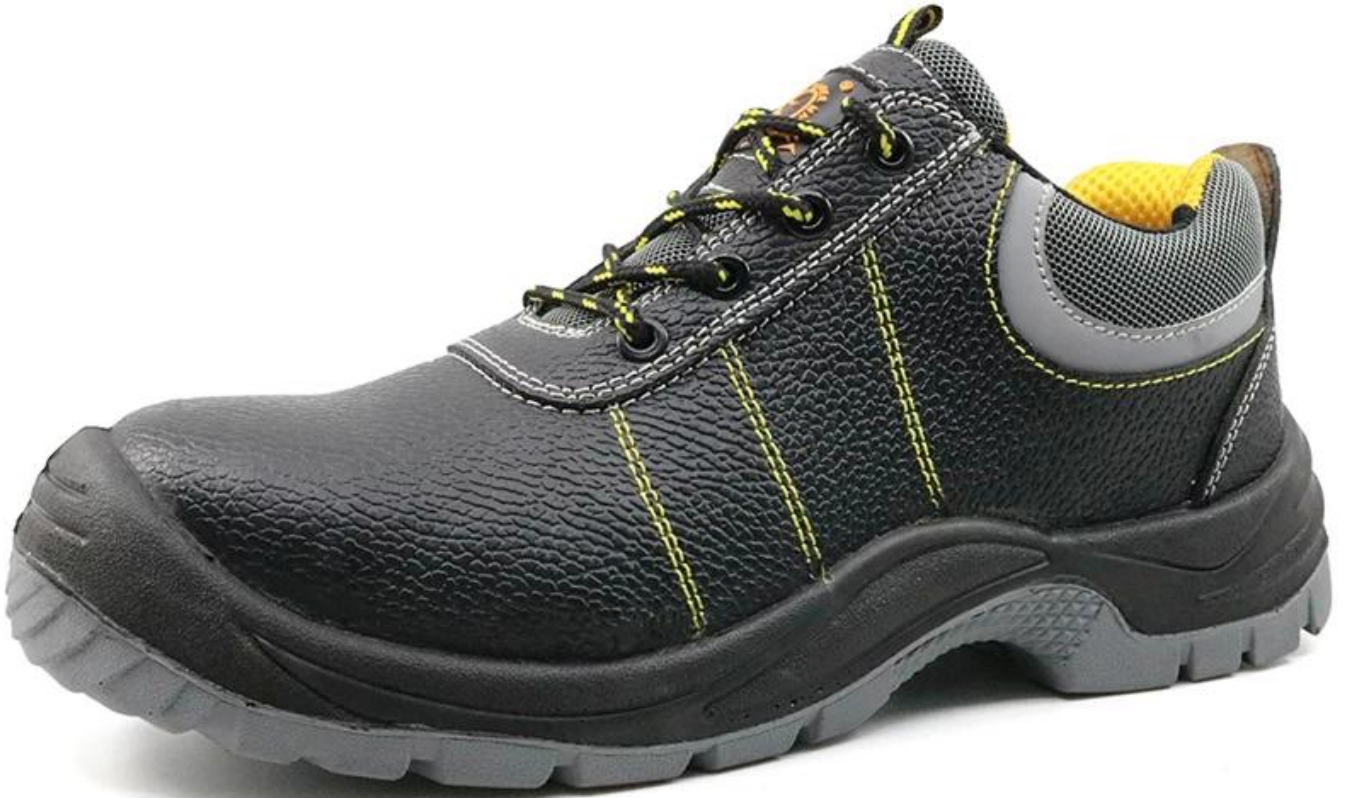



Production Process



Raw Materials



Punching



Cutting



Riveting



Eyeletting



Sewing



Heat - Setting



Molding



Making up



Finished Goods



Packing



Inspection

SAFETY SHOES TEST



Toecap Test ≥ 200 Joules



Midsole Test ≥ 1200 Newtons



ESD Anti-Static Test



Tear Strength ≥ 120 N



**Bondness Test
 ≥ 4.0 N/mm**



Flex Tester $\geq 36,000$ T

Canton Fair



SAFETY SHOES



RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY