

Product Description

Model:	TIGER MASTER 0000 PU 00 00 00 00 000 00 00
Code:	SMR09
Material:	00 : 0000 00 & 0000 00 0000 : PU / PU 00 00 0000
Features:	1. 00 00 0000, 00 00 200 00000. 2. 00 000000.
Dimensions:	1. 0000 00 00 00 00 0000 1100 00. 2. 0 00 00 00
Weight:	1.0 0000 / pr
Color:	00 00 00
Finish:	0000 00
Application:	00 0000 00 0000 (00 0000 000000)
Substrate:	00 EVA 00 HI-POLY 00 PU (0000 00000 00 0000 0000 00 00)
Surface:	PU 00
Texture:	00 00
Temperature:	38-46
Compliance:	CE EN ISO 20345 S1-P SRC 00 00 00 00
Quantity:	6 00
Usage:	00 / 00 / 00 / 00 00, 0000 00, 00 00
Size:	00 00 0 1 0 0, 00 0 10 0 0. 00 00 : 0 58.5 x 40 x 32.5 cm
Weight/Dimensions:	3300 0 / 1x20 '00000 6600 0 / 1x40 '00000

Product Pictures





Company Information



Intertek

EC Type Examination Certificate

CE	<p>Issued to: FUJIAN HONGJIAN SHISE CO., LTD. SHANGHAI INDUSTRIAL ZONE, JINCHANG TOWN, NINGBO 321117, ZHEJIANG PROVINCE, CHINA</p> <p>Authorised Representative: HANDEHU NEW SAFETY PRODUCTS APLC (S. LTD.) 1-101 Village, Xuyuan Street, Jiangyin District, Suzhou, Henan Province, China</p> <p>Date of Issue: 11 January 2018</p> <p>Expiry Date: 11 February 2020</p> <p>Certificate No.: L20170002947 (extension of certificate L20170004196)</p> <p>Product Reference(s): Safety Plug 480V 10A/15A 480V 10A/20A 480V 10A/25A 480V 10A/30A 600V 20A 15A 30A</p> <p>Description: <table style="width: 100%; border: none;"> <tr> <td style="border: none;">Construction</td> <td style="border: none;">Insulation</td> </tr> <tr> <td style="border: none;">Type</td> <td style="border: none;">Open contact</td> </tr> <tr> <td style="border: none;">Material</td> <td style="border: none;">Open plate</td> </tr> <tr> <td style="border: none;">Lead</td> <td style="border: none;">3000</td> </tr> <tr> <td style="border: none;">Wire</td> <td style="border: none;">4000 (Purple)</td> </tr> <tr> <td style="border: none;">Mount</td> <td style="border: none;">ACB</td> </tr> <tr> <td style="border: none;">Type Marking</td> <td style="border: none;">See certificate No.</td> </tr> <tr> <td style="border: none;">Type Range</td> <td style="border: none;">30A/15A</td> </tr> <tr> <td style="border: none;">Category</td> <td style="border: none;">SPP-10A</td> </tr> </table> </p>	Construction	Insulation	Type	Open contact	Material	Open plate	Lead	3000	Wire	4000 (Purple)	Mount	ACB	Type Marking	See certificate No.	Type Range	30A/15A	Category	SPP-10A
Construction	Insulation																		
Type	Open contact																		
Material	Open plate																		
Lead	3000																		
Wire	4000 (Purple)																		
Mount	ACB																		
Type Marking	See certificate No.																		
Type Range	30A/15A																		
Category	SPP-10A																		

C.M. 1667-02947

Product Approval 1667-02947

Issued on behalf of the UK Trading Standards (UKTS) Limited
 1667-02947
 1667-02947



Production Process



Raw Materials



Punching



Cutting



Riveting



Eyeletting



Sewing



Heat - Setting



Molding



Making up



Finished Goods



Packing



Inspection

SAFETY SHOES TEST



Toecap Test ≥ 200 Joules



Midsole Test ≥ 1200 Newtons



ESD Anti-Static Test



Tear Strength ≥ 120 N



**Bondness Test
 ≥ 4.0 N/mm**



Flex Tester $\geq 36,000$ T

SHOES MATERIALS



Genuine Cow Leather




CE Steel Toecap



CE Steel Plate



Composite Toecap

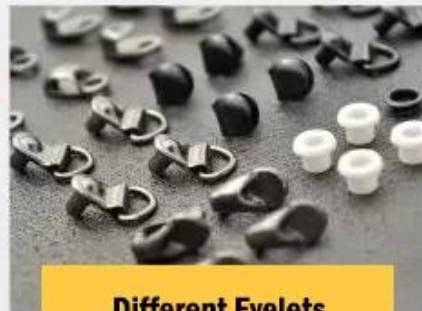

Different Eyelets



Durable Lace



Breathable Lining



Comfortable Insoles



PU or RUBBER or TPU soles

Canton Fair



SAFETY SHOES



RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY