### **Product Description**

	20220 000 000 0 00 00 00 00 00 00
00 00:	TM237
00 0 0:	; PU [] TPU [],
000:	1. 00 0000 200 00 00 00 '00' 0.
	1. 0000 '00 00' 0000 00 00 '1100N. 000 000 000 00 00 00 00 00.
	2. non 🛮 🖺
<u> </u>	KPU
<u> </u>	
<u> </u>	
	0000 000 'HI-POLY' 000 '000' 000 '00'0 '000 00' 0000 00000.
00:	00 00
□:	
<u> </u>	37-47
<u> </u>	CE EN ISO 20345:2011 S3 SRC [[[[[]]]]].
0000:	
00:	100% 00, 00/ 0/ 000/ 00/ 00/ 00 00, 000 00, 00 , 00 00.
	1   /
00000 000:	3300[/1x20" [][][] 6600[]/1x40 [][][]

### Product Pictures







RESISTANT



SHOCK ABSORPTION





ANTI-STATIC PETROL AND CHEMICAL



ANTI-NAIL MIDSOLE



OIL RESISTANT









## **Impact Resistant**

## European Standard Composite Toe Cap





# PUNCTURE PROOF

### Non-metallic Anti-penetration Insoles





## SLIP RESISTANT

### TPU outsole and CE anti slip standard





#### **EU TYPE** EXAMINATION CERTIFICATE

intertek





CEall

terificación Menagos P L/2 Ll Basedo.
Colarecco Sobil el 16 Technolor Vice 3 Al Grades

II September 2001 HIPOGRAFII (be





EWC

## EU TYPE EXAMINATION CERTIFICATE


intertek





manage JUL

## [ PRODUCTION PROCESS ]

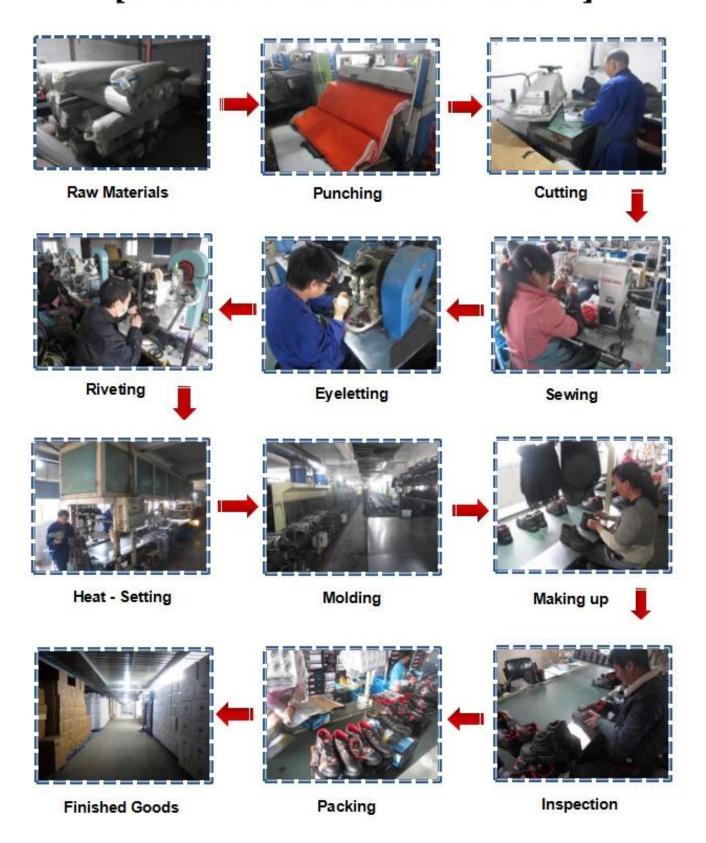

## **SAFETY SHOES TEST**





Toecap Test≥200 Joules



Midsole Test≥1200 Newtons



**ESD Anti-Static Test** 



Tear Strength ≥120N



Bondness Test ≥4.0N/mm



Flex Tester ≥ 36,000T

# Canton Fair





### SAFETY SHOES



### **RAIN BOOTS**





PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY