

Product Description

Product Name:	Slip resistant metal free composite toe water proof executive safety shoes for men
Item No:	6001
Upper and Sole:	Upper: Microfiber leather Sole: PU/PU dual density
Toe:	1. Composite toe to be impact resistant 200 Joules. 2. non is also provided.
Midsole :	1. Non-metallic anti-penetration insoles to be puncture resistant 1100 newton. 2. Non is also provided
Weight:	1.0 kgs/pr
Style:	Laced up
Lining:	Soft PU, it will be kept your feet comfortable
Insoles:	Moulded EVA + mesh or others
Construction:	PU Injection
Height:	Low ankle
Size:	EUR 38-46
Standard:	CE EN ISO 20345 S3 SRC or others as your requirements
Guarantee:	6 months
Function:	Slip/ oil/ impact/ puncture resistant, anti static, water proof, shock absorption
Package:	1 pair per color box, 10 pairs per carton. Carton size: 58.5 x 40 x 32.5 cm
Load quantity of Container:	3300pairs /1x20' container 6600pairs /1x40' container

Product Pictures





Company Information



Intertek

EC Type Examination Certificate



Issued to: FUJIAN HONGJIAN SHISEI CO., LTD.
SHANGHAI INDUSTRIAL ZONE, JIANGNAN TOWN, NINGBO
321117, ZHEJIANG PROVINCE, CHINA

Authorised Representative: HANDEHU SHANGHAI ELECTRICITY APPL. CO., LTD.
1201 Village, Xujiao Town, Jiangyin District, Suzhou,
Henanjiang Province, China

Date of Issue: 11 January 2018

Expiry Date: 11 February 2020

Certificate No.: L20170002947 (extension of certificate L20170294719)

Product Reference(s): Safety Group:
480V-1000V
480V-1000V
480V-1000V
480V-1000V
480V-1000V
480V-1000V

Description:

Construction:	Insulation
Terminal:	Open terminal
Material:	Open wire
Core:	0.50
Wire:	0.50 (PVC)
Mark:	AC0
Test frequency:	See technical file
Test range:	0.5A
Category:	001-01A

C.M. 1687-0218

 **Product Approval** 1687-0218

Intertek Testing Services (UK) Limited, 35 Littleport Way, Lutterworth, Leicestershire, LE15 3RD, UK



Production Process



Raw Materials



Punching



Cutting



Riveting



Eyeletting



Sewing



Heat - Setting



Molding



Making up



Finished Goods



Packing



Inspection

SAFETY SHOES TEST



Toecap Test ≥ 200 Joules



Midsole Test ≥ 1200 Newtons



ESD Anti-Static Test



Tear Strength ≥ 120 N



**Bondness Test
 ≥ 4.0 N/mm**



Flex Tester $\geq 36,000$ T

SHOES MATERIALS



Genuine Cow Leather




CE Steel Toecap



CE Steel Plate



Composite Toecap

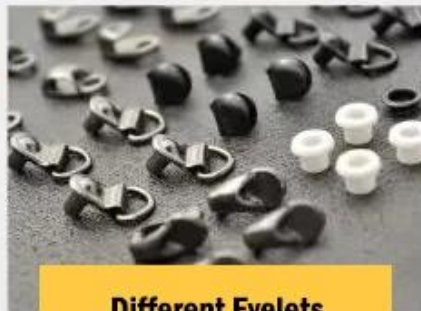

Different Eyelets



Durable Lace



Breathable Lining



Comfortable Insoles



PU or RUBBER or TPU soles

Canton Fair



SAFETY SHOES



RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY