Product Description

Product Name:	Tiger master brand leather construction safety boots steel toe
Item No:	DTA032H
Upper and Sole:	Upper: Smooth cow split leather Sole: PU dual density
Toe:	1. Steel toe cap, it can be impact resistant 200 Joules.
	2. non is also provided.
Midsole :	 Steel plate, it can be puncture resistant 1100 newton. Non is also provided
Weight:	1.2 kgs/pr
Collar:	High density oxford fabric with sponge
Tongue:	High density oxford fabric
Lining:	Black air & dry sandwich mesh fabric (Your feet will be kept dry and comfortable)
Sockliner:	Moulded EVA or HI-POLY or PU (Greatly reduce your pain & fatigue from daily work)
Construction:	PU Injection
Height:	High ankle
Size:	37-47 (3-13)
Standard:	CE EN ISO 20345 S1P SRC or others as your requirements
Guarantee:	6 months
Package:	1 pair per color inner box packing, 10 pairs per carton.
Carton Size	59 x 44 x 33 cm
Load quantity of Container:	3200pairs /1x20' container 6400pairs /1x40' container

Product Pictures






Company Information





Production Process

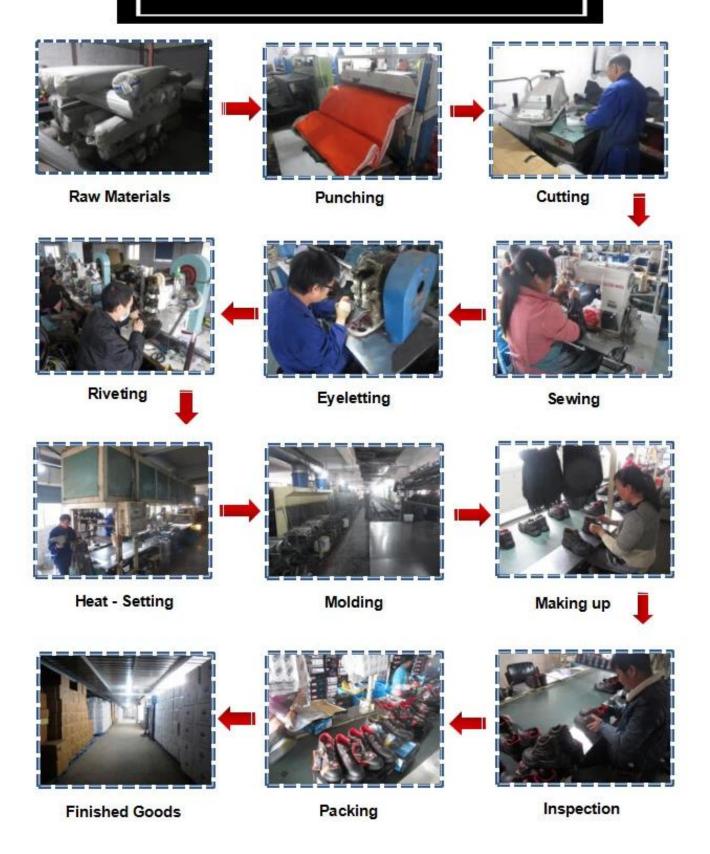

SAFETY SHOES TEST





Toecap Test≥200 Joules



Midsole Test≥1200 Newtons



ESD Anti-Static Test



Tear Strength ≥120N



Bondness Test ≥4.0N/mm



Flex Tester ≥ 36,000T

Canton Fair





SAFETY SHOES



RAIN BOOTS





PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY