

## Product Description

Product Name:	Anti slip steel toe puncture proof leather safety shoes without lace
Item No:	HA5020
Upper and Sole:	Upper: Corrected split cow leather Sole: PU/PU dual density
Toe:	1. Steel toe to be impact resistant 200 Joules. 2. non is also provided.
Midsole :	1. Steel plate to be puncture resistant 1100 newton. 2. Non is also provided
Weight:	1.1 kgs/pr
Style:	No lace, with double-sided elastic gore
Lining:	Air mesh fabric, it will be kept your feet comfortable
Insoles:	Moulded EVA + mesh or others
Construction:	PU Injection
Height:	Middle cut
Size:	EUR 38-46
Standard:	CE EN ISO 20345 SB-P SRC or others as your requirements
Guarantee:	6 months
Function:	Slip/ oil/ impact/ puncture resistant, anti static, water proof, shock absorption
Package:	1 pair per color box, 10 pairs per carton. Carton size: 59 x 44 x 33 cm
Load quantity of Container:	3300pairs /1x20' container 6600pairs /1x40' container

## Product Pictures







## ***Company Information***



**Intertek**

### EC Type Examination Certificate

**CE**

**Issued to:** FUJIAN HONGJIAN SHIYE CO., LTD.  
SHANGU INDUSTRIAL ZONE, JIANGMEN TOWN, NINGBO  
321117, ZHEJIANG PROVINCE, CHINA

**Authorised Representative:** HANDESHI SHIYE FUZHONGGUO APMC (UK) LTD.  
1401 VILLAGE, NORTH STAR, JIANGMEN TOWN, NINGBO  
PROVINCE, CHINA

**Date of Issue:** 11 January 2018

**Expiry Date:** 11 February 2020

**Certificate No.:** L30170002947 (extension of certificate L30170004194)

**Product Reference(s):**  
Safety Valve  
48501-08012  
48501-08014  
48501-08018  
48501-08019  
8810-320-320-320

**Description:**  
Construction: Cast iron  
Type: Direct acting  
Material: Steel valve  
Seat: Steel valve  
Port: G1/2  
Size: 1/2  
Mount: A221  
Test Pressure: 16 bar maximum Pn  
Test Range: 0.05-16 bar  
Category: 320-320-320

**Product Name:** *CUU* 160102947

**Product Reference:** *CUU* 160102947

**Product Description:** 16 bar maximum Pn  
1/2" and 3/4" port size of 1/2" NPT  
NPT/BSPP/BSPT

**Product Reference:** *CUU* 160102947

**Product Description:** 16 bar maximum Pn  
1/2" and 3/4" port size of 1/2" NPT  
NPT/BSPP/BSPT

**Product Reference:** *CUU* 160102947

**Product Description:** 16 bar maximum Pn  
1/2" and 3/4" port size of 1/2" NPT  
NPT/BSPP/BSPT

# Production Process



Raw Materials



Punching



Cutting



Riveting



Eyeletting



Sewing



Heat - Setting



Molding



Making up



Finished Goods



Packing



Inspection

# SAFETY SHOES TEST



**Toecap Test  $\geq 200$  Joules**



**Midsole Test  $\geq 1200$  Newtons**



**ESD Anti-Static Test**



**Tear Strength  $\geq 120$ N**



**Bondness Test  
 $\geq 4.0$ N/mm**



**Flex Tester  $\geq 36,000$ T**

# SHOES MATERIALS



**Genuine Cow Leather**




**CE Steel Toecap**



**CE Steel Plate**



**Composite Toecap**

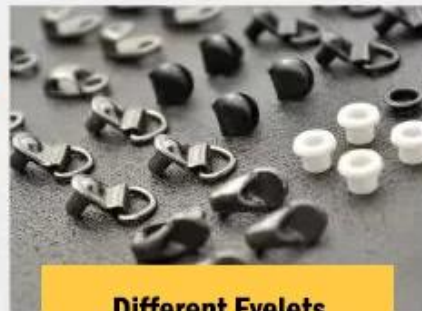

**Different Eyelets**



**Durable Lace**



**Breathable Lining**



**Comfortable Insoles**



**PU or RUBBER or TPU soles**



# Canton Fair



## SAFETY SHOES



## RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY