

Product Description

Product Name:	Tiger master oil and gas industry waterproof safety boots
Item No:	TM105
Upper and Sole:	Crazy horse leather upper, PU & RUBBER sole
Toe:	1. Composite toe cap to be impact resistant. To protect your feet toe without hazard. 2. non is also provided.
Midsole :	1. Non-metallic anti-penetration insoles to be puncture resistant. To protect your feet without puncture by nail or sharp objects. 2. non is also provided
Collar:	High density oxford fabric
Tongue:	High density oxford fabric & crazy horse leather
Lining:	Air sandwich mesh fabric and waterproof socks inside
Shoe pads:	Removable HI-POLY insole offers superior underfoot support and cushioned comfort.
Construction:	Injection moulded
Height:	Mid cut
Size:	37-47
Standard:	CE EN ISO 20345:2011 S3 SRC or others.
Guarantee:	6 months The sole is not broken from the middle or pulled off within six month after the goods getting to destination port. No guarantee for the upper.
Function:	Heat resistant the degree of 300, 100% waterproof, oil/ acid/ petrol/ chemical/ slip/ impact/ puncture resistant, metal free, shock absorption.
Package:	1 pair per color box, 10 pairs per carton. Carton size: 59 x 44 x 33 cm
Load quantity of Container:	3200pairs /1x20' container 6400pairs /1x40' container

Product Pictures



**200 JOULE
TOECAP**



**SLIP-
RESISTANT**



**SHOCK
ABSORPTION**



ANTI-STATIC



**PETROL AND
CHEMICAL
RESISTANT**



**ANTI-NAIL
MIDSOLE**





**OIL
RESISTANT**





Company Information

TIGER MASTER OFFICE SHOW

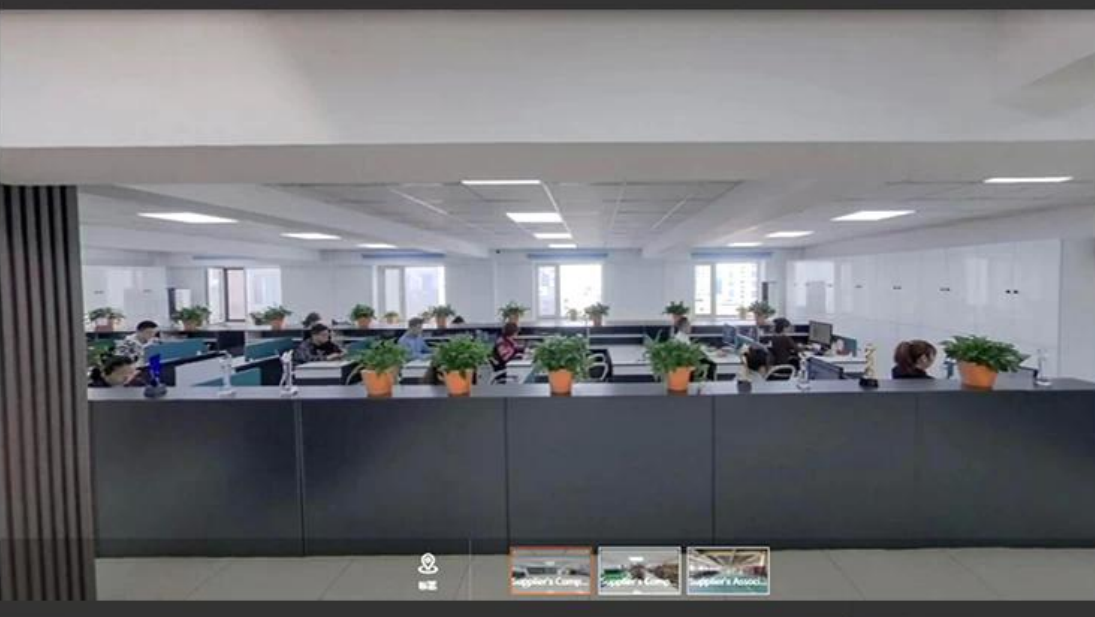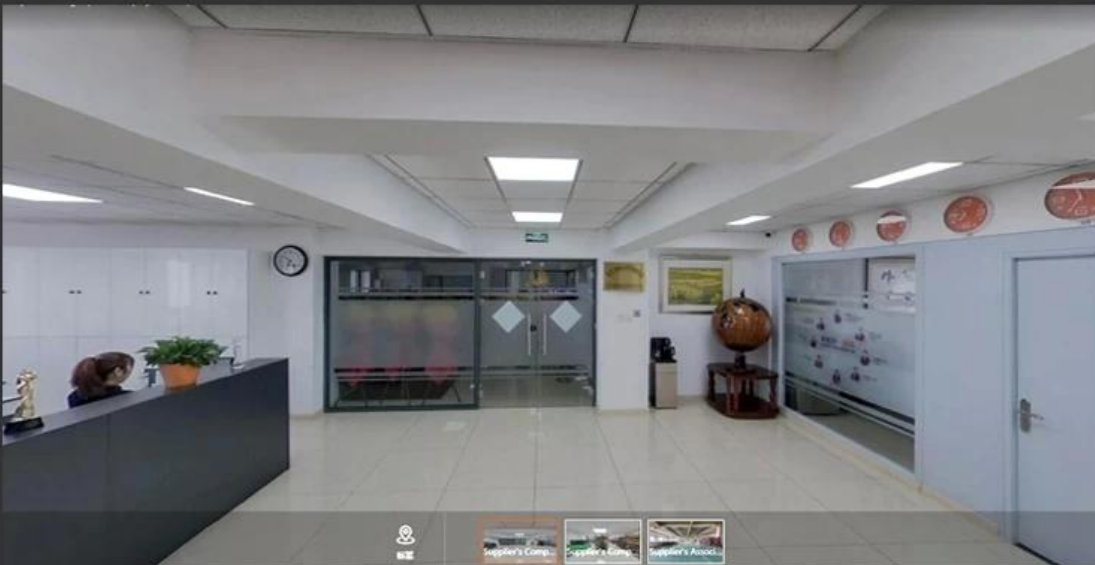

TIGER MASTER SAMPLE ROOM



SAFETY SHOES TEST



Toecap Test ≥ 200 Joules



Midsole Test ≥ 1200 Newtons



ESD Anti-Static Test



Tear Strength ≥ 120 N



**Bondness Test
 ≥ 4.0 N/mm**



Flex Tester $\geq 36,000$ T

Production Process



Raw Materials



Punching



Cutting



Riveting



Eyeletting



Sewing



Heat - Setting



Molding



Making up



Finished Goods



Packing



Inspection

Canton Fair



SAFETY SHOES



RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY

