Product Description

Black leather rubber sole no lace industrial safety shoes leather zipper				
TM2032				
Upper: Embossed split cow leather; Sole: Natural rubber				
1. Steel toe cap to be impact resistant 200 joules. To protect your feet toe without hazard.				
2. non is also provided.				
1. Steel plate to be puncture resistant . To protect your feet without puncture by nail or sharp objects.				
2. non is also provided				
Without laces, with zipper				
PU artificial leather				
Soft air mesh fabric lining for a comfort fit				
Removable moulded EVA insole offers superior underfoot support and cushioned comfort				
Cemented				
Mid cut				
36-47				
CE EN ISO 20345:2011 SB-P SRC or others.				
6 months The sole is not broken from the middle or pulled off within six month after the goods getting to destination port. No guarantee for the upper.				
Slip/ oil/ acid/ petrol/ chemical/ impact/ puncture resistant, shock absorption, durable, antistatic & waterproof available				
1 pair per color box, 10 pairs per carton. Carton size: 59 x 44 x 33 cm				
3200pairs /1x20' container 6400pairs /1x40' container				

Product Pictures











SHOCK ABSORPTION





ANTI-STATIC PETROL AND CHEMICAL RESISTANT



ANTI-NAIL MIDSOLE



OIL RESISTANT







Company Information

Tiger Master is safety shoes and PVC rain boots manufacturer. We have been qualified ISO 9001:2015 quality management system. Also, some of our hot sale models have qualified CE ENISO 20345:2011 and ASTM F2413-18. Meanwhile, we are also a professional brand for PPE (Personal protective equipment), especially in the fields of safety gloves, working garments, helmets, safety vest, ear muff/plug, safety harness, rain coat/suit etc.

Thank you for your interest of Tiger Master, hope you can find the products you want and start our business cooperation. If you need more information, please do not hesitate to contact us, we are always ready here.







TIGER MASTER OFFICE SHOW





TIGER MASTER SAMPLE ROOM





SAFETY SHOES TEST





Toecap Test≥200 Joules



Midsole Test≥1200 Newtons



ESD Anti-Static Test



Tear Strength ≥120N




Bondness Test ≥4.0N/mm



Flex Tester ≥ 36,000T

Production Process

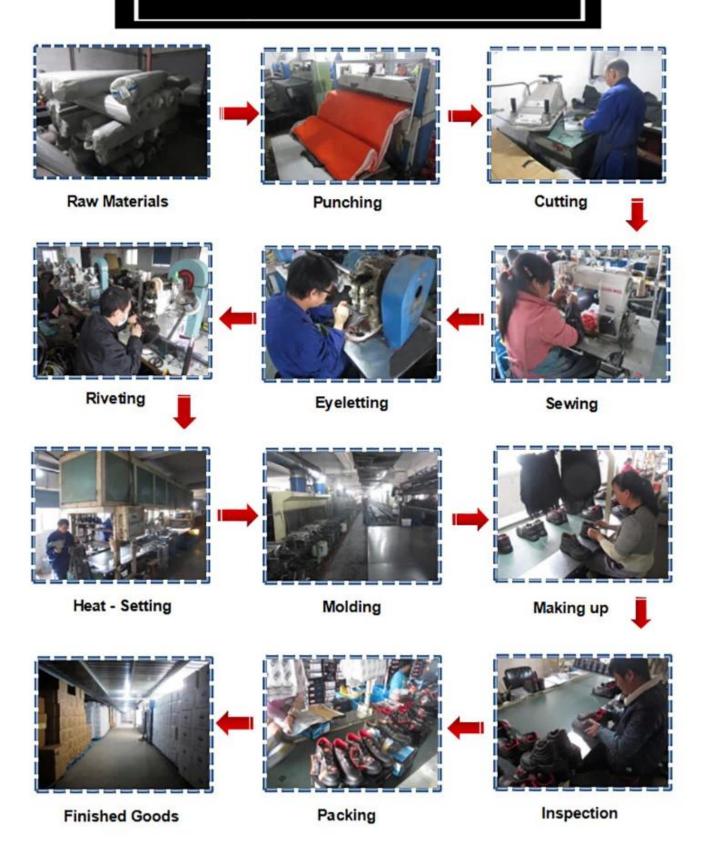

PERSONAL PROTECTIVE EQUIPMENT WORK SAFETY SOLUTION PROVIDER





