

Product Description

Nome do Produto:	peso leve moda respirável esporte sapatos de segurança biqueira de aço
Item número:	DTA037
Parte superior e sola:	Parte superior: tecido de malha voadora respirável a ar 3D Sola: PU delta densidade dupla mais sola
Dedo do pé:	1. biqueira de aço, pode ser resistente a impactos 200 joules. 2. non também é fornecido.
Entressola:	1 Chapa de aço, pode ser punção resistente 1100 Newton. 2) Não é Além disso forneceu
Peso:	1,0 kgs / pr
Colarinho:	Tecido tricotado voador respirável a ar 3D
Língua:	Tecido de malha de alta densidade
Forro:	tecido cinza de malha de ar e sanduíche seco (seus pés serão mantidos secos e confortáveis)
Sockliner:	EVA moldado ou HI-POLY ou PU (reduz bastante sua dor e fadiga do trabalho diário)
Construção:	Injeção de PU
Altura:	Tornozelo baixo
Tamanho:	37-47 (3-13)
Padrão:	CE EN ISO 20345 SB-P SRC ou outros como seus requisitos
Garantia:	6 meses
Pacote:	1 par por color embalagem interior da caixa, 10 pares por caixa.
Tamanho da caixa	58,5 x 40 x 32,5 cm
Quantidade de carga do recipiente:	3300pairs / 1x20 'container 6600pairs / 1x40 'container

Product Pictures





Company Information



Intertek

EC Type Examination Certificate

CE	Issued to:	PHOENIX HONGKONG SHENZHEN CO., LTD. SHANGHAI INDUSTRIAL ZONE, JIANGNAN TOWN, NUSUN 2017, JIANGSU PROVINCE, CHINA
	Authorised Representative:	Intertek Asia SAFETY PRODUCTS APC (S) LTD. 1201 Village Square Street, Village Square, North Singapore 549876, CHINA
	Date of Issue:	11 January 2018
	Expiry Date:	11 February 2020
	Certificate No.:	LEC170002947 (extension of certificate LEC170294196)
	Product Reference(s):	Safety Group: 48001-48002 48003-48004 48005-48006 48007-48008 800-809-809-810
	Description:	Construction: Inverter Type: 200V inverter Material: Steel plate Color: SS02 Size: 800 (Length) Mount: ACB Type Rating: 200V/2000VA/10 Type Range: 20-40 Category: 800-810A

C.M. 1587-02947

Product Approval: 1587-02948

Intertek Testing Services (UK) Limited



Production Process



Raw Materials



Punching



Cutting



Riveting



Eyeletting



Sewing



Heat - Setting



Molding



Making up



Finished Goods



Packing



Inspection

SAFETY SHOES TEST



Toecap Test ≥ 200 Joules



Midsole Test ≥ 1200 Newtons



ESD Anti-Static Test



Tear Strength ≥ 120 N



**Bondness Test
 ≥ 4.0 N/mm**



Flex Tester $\geq 36,000$ T

SHOES MATERIALS



Genuine Cow Leather




CE Steel Toe cap




CE Steel Plate



Composite Toe cap

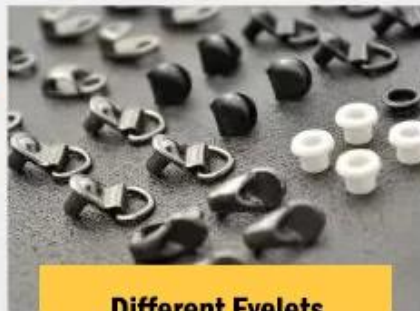

Different Eyelets

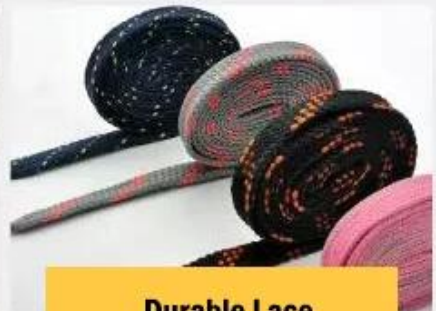

Durable Lace



Breathable Lining



Comfortable Insoles



PU or RUBBER or TPU soles

Canton Fair



SAFETY SHOES



RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY