

Product Description

Nome do Produto:	Resistente ao óleo antiderrapante couro preto composto do dedo do pé isolamento 18KV sapatos de segurança do trabalho elétrico
Item número:	SDHL01
Parte superior e sola:	Parte superior: Couro de vaca rachado em relevo Sola: Sola de dupla densidade PU / PU
Dedo do pé:	1. Dedo do pé composto, pode ser resistente a impactos 200 Joules. 2. non também é fornecido.
Entressola:	1 Palmilhas anti-penetração não metálicas para estar punção resistente 1100 Newton. 2) Não é Além disso forneceu
Peso:	1,1 kgs / pr
Colarinho:	Couro artificial PU
Língua:	Couro artificial PU
Resina:	Tecido de malha de ar (seus pés serão mantidos confortáveis)
Sockliner:	EVA moldado ou HI-POLY ou PU (reduz bastante sua dor e fadiga do trabalho diário)
Construção:	Injeção de PU
Altura:	Corte médio
Tamanho:	38-46
Padrão:	CE EN ISO 20345 SB-P SRC ou outros como seus requisitos
Garantia:	6 meses
Função:	Deslizamento / óleo / impacto / resistente a perfurações, isolamento 18KV, absorção de choque
Pacote:	1 par por caixa de cor, 10 pares por caixa. Tamanho da caixa: 59 x 44 x 33 cm
Quantidade de carga do recipiente:	3300pairs / 1x20 'container 6600pairs / 1x40 'container

Product Pictures







Company Information



Intertek

EC Type Examination Certificate



Issued to: FUJIAN HONGJIAN SHISEI CO., LTD.
SHANGHAI INDUSTRIAL ZONE, JIANGNAN TOWN, NINGBO
321117, ZHEJIANG PROVINCE, CHINA

Authorised Representative: HANDEHU SHANGHAI ELECTRICITY APPL. CO., LTD.
1201 Village, Xujiahui Town, Xujiahui Street, Shanghai
Pudong District, China

Date of Issue: 11 January 2018

Expiry Date: 11 February 2020

Certificate No.: L20170002947 (extension of certificate L20170004199)

Product Reference(s): Safety Group:
480V-100A/2
480V-100A/4
480V-100A/6
480V-100A/8
480V-100A/10
480V-100A/12

Description:

Construction:	Indoor
Terminal:	Open terminal
Material:	Open wire
Core:	CU
Wire:	600V PLY/PE
Mount:	ACB
Test frequency:	See technical file
Test range:	30-40
Category:	BBP-40A

C.M. 1687-02018

 *P. Li* 1687-02018

Authorized Representative
1201 Village, Xujiahui Town, Xujiahui Street, Shanghai
Pudong District, China
Tel: +86 21 5835 1111
Fax: +86 21 5835 1112
E-mail: info@handehu.com

Intertek Testing Services (UK) Limited
15, West Nyack Lane, Wyckoff, NJ 07471, USA
Tel: +1 201 261 1313
Fax: +1 201 261 1314
E-mail: info@intertek.com



Production Process



Raw Materials



Punching



Cutting



Riveting



Eyeletting



Sewing



Heat - Setting



Molding



Making up



Finished Goods



Packing



Inspection

SAFETY SHOES TEST



Toecap Test ≥ 200 Joules



Midsole Test ≥ 1200 Newtons



ESD Anti-Static Test



Tear Strength ≥ 120 N



**Bondness Test
 ≥ 4.0 N/mm**



Flex Tester $\geq 36,000$ T

SHOES MATERIALS



Genuine Cow Leather




CE Steel Toecap



CE Steel Plate



Composite Toecap

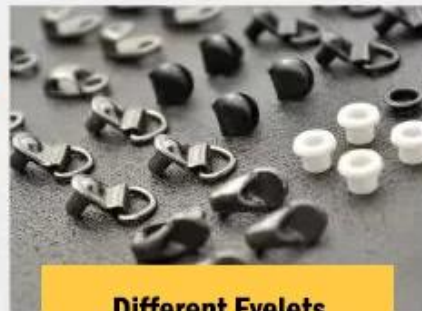

Different Eyelets



Durable Lace



Breathable Lining



Comfortable Insoles



PU or RUBBER or TPU soles

Canton Fair



SAFETY SHOES



RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY