

Product Description

Наименование товара:	легкая дышащая мода спортивная защитная обувь стальной носок
Предмет номер:	DTA037
Верхняя и единственная:	Верх: воздухопроницаемый 3D летающий трикотаж Подошва: PU двойная плотность дельта плюс подошва
Палец:	1. Стальной носок, он может быть ударопрочным 200 Дж. 2. не предоставляется.
Midsole:	1. Стальная пластина, может быть прокол резистентный 1100 ньютон. 2. не является также при условии
Вес:	1,0 кг / пр
Воротник:	Воздухопроницаемый 3D летающий трикотаж
Язык:	Сетка высокой плотности
Подкладка:	серая воздушная и сухая сэндвич-ткань (Ваши ноги будут сухими и удобными)
стелька:	Формованная EVA или HI-POLY или PU (значительно уменьшает вашу боль и усталость от ежедневной работы)
Строительство:	ПУ инъекций
Высота:	Низкая лодыжка
Размер:	37-47 (3-13)
Стандарт:	CE EN ISO 20345 SB-P SRC или другие как ваши требования
Гарантия:	6 месяцев
Пакет:	1 пара за сВнутренняя упаковка olog, 10 пар в коробке.
Размер коробки	58,5 x 40 x 32,5 см
Количество загрузки контейнера:	3300 пар / 1x20 'контейнер Контейнер 6600 пар / 1x40 '

Product Pictures





Company Information



Intertek

EC Type Examination Certificate



Issued to: FUJIAN HONGJIAN SHISEI CO., LTD.
SHANGHAI INDUSTRIAL ZONE, JIANGNAN TOWN, NINGBO
321117, ZHEJIANG PROVINCE, CHINA

Authorised Representative: HANDEHU NEW SAFETY PRODUCTS APLC (S) LTD.
1201 Village, North Zone, Jiangyin District, Suzhou,
Henan Province, China

Date of Issue: 11 January 2018

Expiry Date: 11 February 2020

Certificate No.: L20170002947 (extension of certificate L20170294719)

Product Reference(s): Safety Plug
480V 10A/15A
480V 10A/20A
480V 10A/25A
480V 10A/30A
500V 20A 15W-30W

Description:

Construction:	Insulation
Terminal:	Open contact
Material:	Open slot
Lead:	0.05
Wire:	3000 (PVC)
Mount:	ACB
Test frequency:	See national file
Test range:	20-40
Category:	3000-40A

Authorised Representative: *C.M.* 1687-02318

Product Reference: 1687-02318

Issued by: Intertek Testing Services (UK) Limited



Production Process



Raw Materials



Punching



Cutting



Riveting



Eyeletting



Sewing



Heat - Setting



Molding



Making up



Finished Goods



Packing



Inspection

SAFETY SHOES TEST



Toecap Test ≥ 200 Joules



Midsole Test ≥ 1200 Newtons



ESD Anti-Static Test



Tear Strength ≥ 120 N



**Bondness Test
 ≥ 4.0 N/mm**



Flex Tester $\geq 36,000$ T

SHOES MATERIALS



Genuine Cow Leather




CE Steel Toecap



CE Steel Plate



Composite Toecap

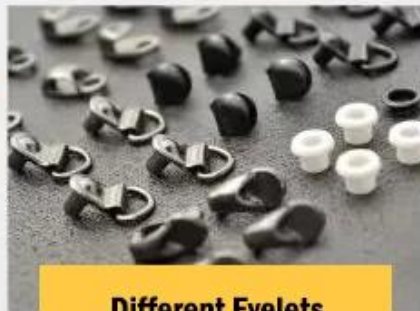

Different Eyelets



Durable Lace



Breathable Lining



Comfortable Insoles



PU or RUBBER or TPU soles

Canton Fair



SAFETY SHOES



RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY